

东莞市国亚电子有限公司

DONGGUO GUOYA ELECTRONICS CO.,LTD

地 址: 广东省东莞市长安镇增田村横增路 72 号

Address: 72 Hengzeng Road, Zengtian Village, Chang' an Town, Dongguan cigy, Guangdong Province

E-Tel: 0769-81769816 传真: 0769-87089563

QQ: 316563782 诚信通: gya 旗舰店

E-mail: gya1688@gdgya.com 网站: www.gdgya.com

Type Document	Crimp Specification	Revised /Edition	A0
Date Issued:		Data Revised:	2019/06/09
Subject: 1506T			Issued By:
1.50mm Pitch Terminal crimp specification			Engineering Dept.

## **Description:**

Height and width of crimped core should he set as required.


(Crimped height and width of wire barrel)


According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted

wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

## **Position Graph:**

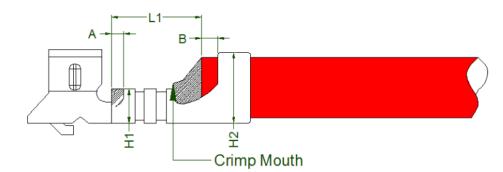



#### Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H2
- 3. Insulator crimp width. W1
- 4. Insulator crimp height. W2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like Shell.



东莞市国亚电子有限公司

DONGGUO GUOYA ELECTRONICS CO.,LTD

址:广东省东莞市长安镇增田村横增路 72号 地

Address: 72 Hengzeng Road, Zengtian Village, Chang' an Town, Dongguan cigy, Guangdong Province

E-Tel: 0769-81769816 传真: 0769-87089563 E-mail: gya1688@gdgya.com QQ: 316563782 诚信通: gya旗舰店 网站: www.gdgya.com

Type Document	Crimp Specification	<b>Revised /Edition</b>	A0
Date Issued:		Data Revised:	2019/06/09
Subject: 1506T			Issued By:
1.50mm Pitch T	Cerminal crimp specifica	ation	Engineering Dept.

# **Requirement:**

Subject:UL1061 or equivalent type electric wire								
AWG#	Conductor (mm <sup>2</sup> )	Insulation Dia	imeter	Insulator skins length	Dim. L (mm) out			
#28~#24	<b>0.</b> 08 <b>~0.22mm</b> <sup>2</sup>	0. 9 <b>~</b> 1. 2 <b>mm</b>		0.3~0.5mm	1.8~2.2mm			
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile			
(AWG#)	Width(W1)	Height(H1)	Width(W2)	Height(H2)	Strength			
#24		<b>0.61</b> ±0.03 <b>mm</b>		<b>1.3</b> ±0.05 <b>mm</b>	2.27Kgf			
#26	1.05±0.05mm	<b>0.57</b> ±0.03 <b>mm</b>	<b>1.15<math>\pm</math></b> 0.05mi	m <b>1.1</b> ±0.05mm	1.37Kgf			
#28		<b>0.53</b> ±0.03 <b>mm</b>		<b>1.0</b> ±0.05 <b>mm</b>	0.91Kgf			

## **Remarks:**

Unalike equipments and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Signature: Lvtiansheng\_\_\_ENG Dongguan GuoYa Electronics CO.,LTD.