
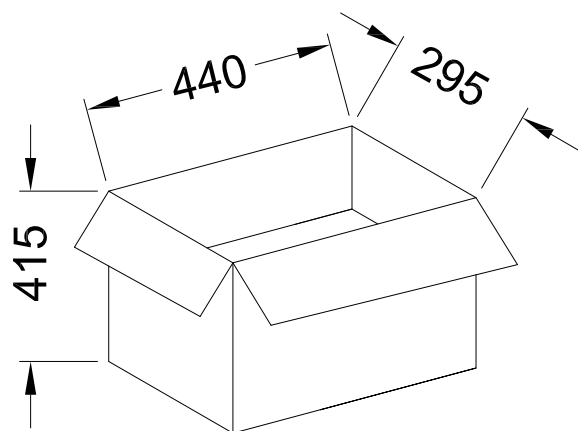
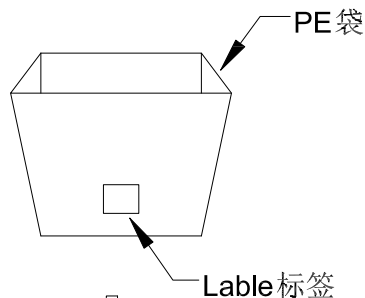



RoHS

包装图



胶带ADHESIVE TAPE

标签LABEL

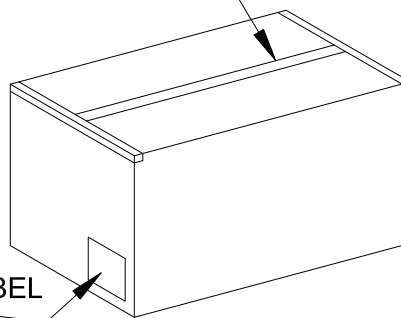

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 130 * 135 * 0.10 mm, Packing detail see the table below

将 Housing放入PE袋内, PE袋规为:130*135*0.10mm, 详细包装见下表

2. Put PE bag packed products in specifications of 440*295*415mm mm cartons, Packing detail see the table below

将装好产品的PE袋放入规格为440*295*415mm的纸箱内, 详细包装见下表

3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.

4. There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used

每箱不可有脏污, 变形现象, 尾数箱必须用填充物

5. Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度: 6~7mm

Poles	Bag PCS	CARTON Bag	CARTON PCS
02	1000	75	75K
03	1000	75	75K
04	1000	75	75K
05	1000	75	70K
06	1000	75	70K
07	1000	65	65K
08	1000	65	65K
09	1000	60	60K
10	1000	55	55K
11	1000	50	50K
12	1000	45	45K
13	1000	40	40K
14	1000	35	35K
15	1000	30	30K

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.:

1515H-XX-XXHF

TITLE:

1.50mm Housing Package

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

RoHS

包装图

Adhesive tape胶带

Label

Eco-Label

环保标签

Tape over the terminal

纸带在端子上方

卷装方式
Package way

Note注解:

1.Quantity数量:

10K PCS/REEL 一卷10K/PCS

10 REEL/BOX 一箱10卷

100K PCS/BOX 一箱100K/PCS

2.Each reel and outer box must be labeled and
Eco-Label Respectively labeled

每盘和外箱都必须有标签及环保标签分别标示

3.Terminal winding direction as shown

端子缠绕方向如左图所示

4.There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used

每箱不可有脏污,变形现象,尾数箱必须用填充物

5.Carton material: K=K, Carton thickness: 6~7mm

纸箱材质:K=K, 纸箱厚度: 6~7mm




Label unified on the box top right corner

外箱标签位于右上角

Adhesive tape胶带

Label

标签

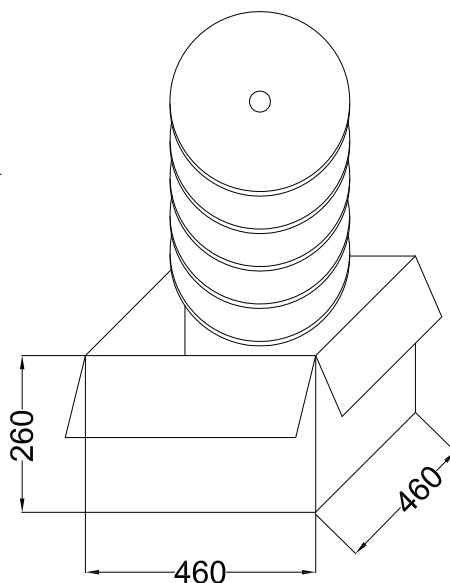

GENERAL TOLERANCE

.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X° $\pm 0.2^\circ$

视图

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.:

1515T-PXX-X

TITLE:

1.50 mm Terminal Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-014

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5





6

7

8

RoHS

包装图

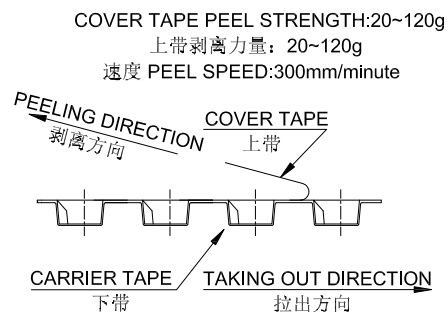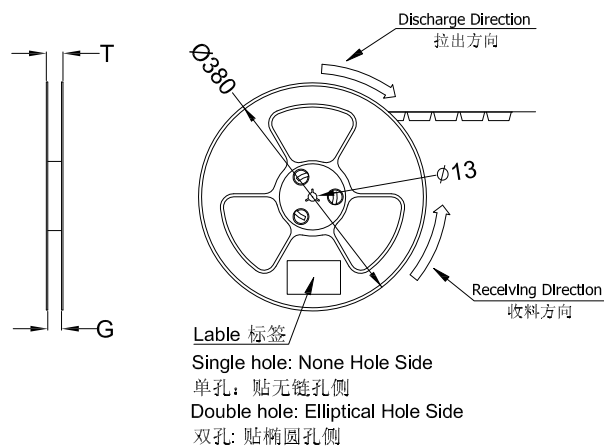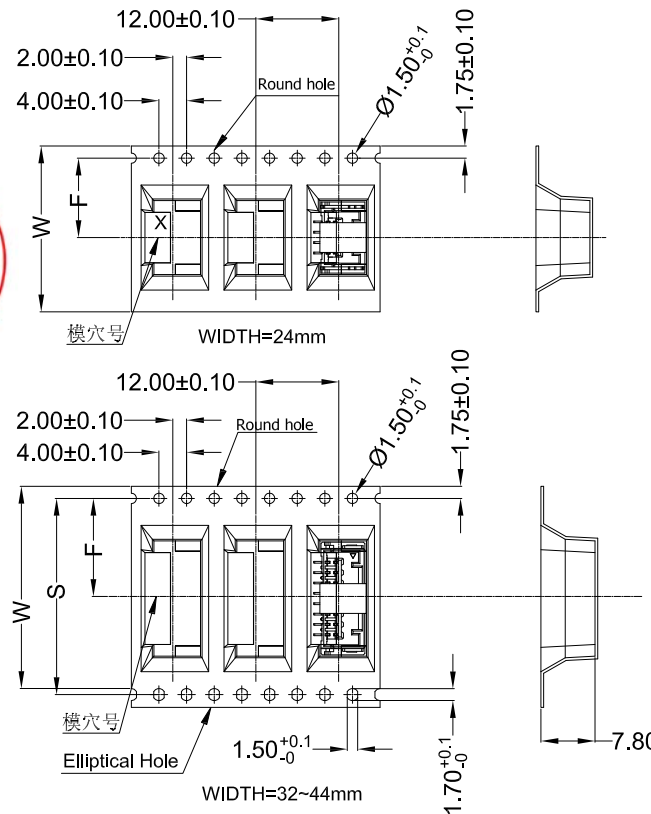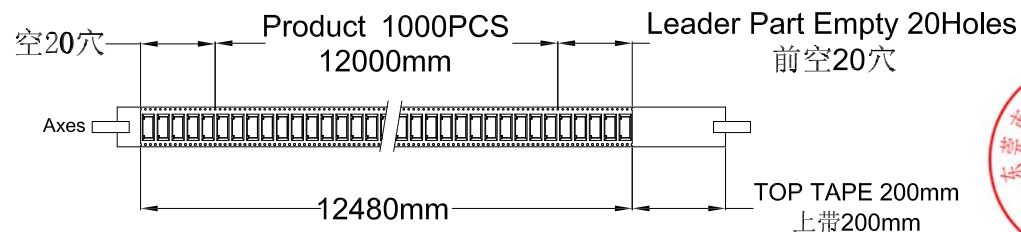

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
- Carrier tape material for PS ; 下带材质为PS材质; Color颜色:Natural透明色; 无卤
- bracer保护带; Color颜色:Natural透明色, 厚度0.40mm最小
- Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
- Carton material纸箱材质:K=K; Carton Thickness纸箱厚度: 6~7mm

	Pin No.	W	S	F	T	G	Cover Tape (宽度) 上带(W)	Carrier Tape(Color) 下带(颜色)	REEL PCS	CARTON R	CARTON PCS
ZD1515WVS-XXHF	ZD1515WVS-02HF 2Pin~5Pin	24	/	11.50	28.50	24.40	21.3	透明色	1000	12R	12000
1515WVS-XX-LPSW	ZD1515WVS-06HF 6Pin~9Pin	32	28.40	14.20	36.50	32.40	25.5		1000	9R	9000
	ZD1515WVS-10HF 10Pin~15Pin	44	40.40	20.20	48.50	44.40	37.5		1000	7R	7000

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.:

PPN: 1515WVS-XX-LPSW
CTN: ZD1515WVS-XXHF

TITLE:

1.50mm SMT 180° Packing





UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
------	-----	---------	-------------	--------	----------

1 2 3 4 5 6 7 8

RoHS

包装图

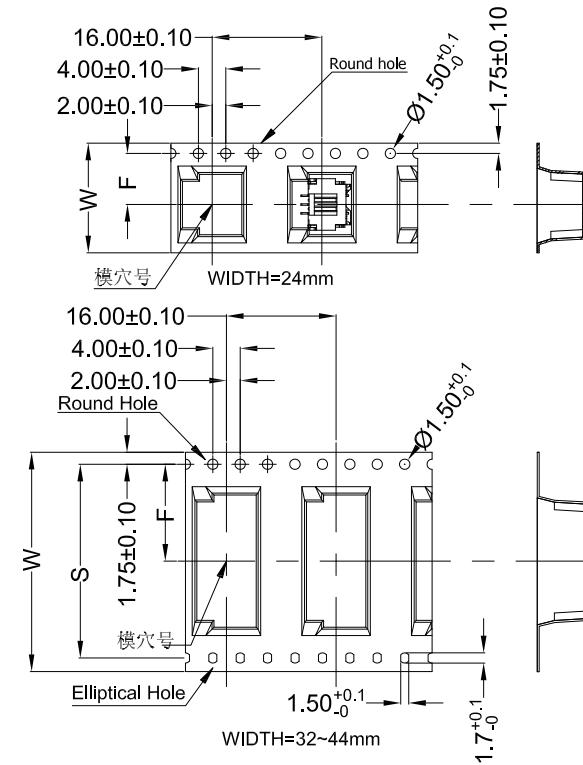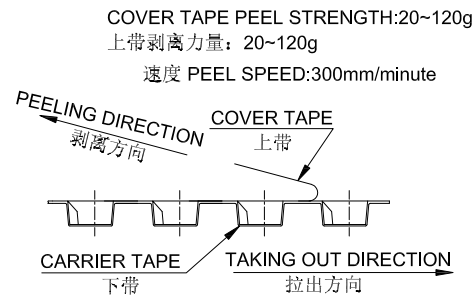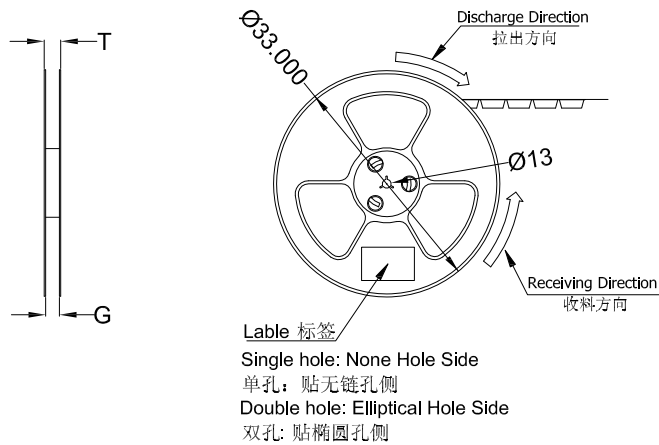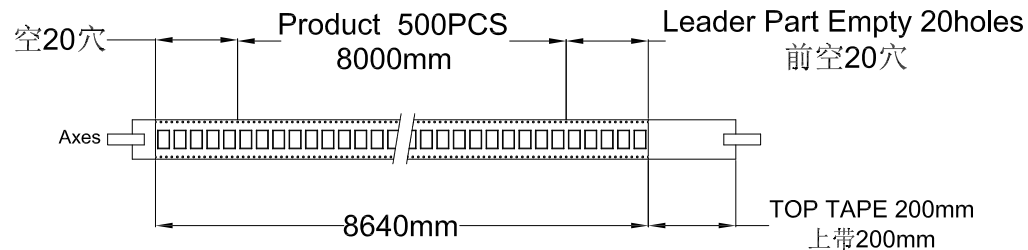

Note:

1. Carrier Camber Is Within 1mm In 100mm; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距离累计允许公差为±0.2mm
3. Carrier tape material for PS; 下带材质为PS材质; Color颜色:Natural透明色; 无卤
4. bracer保护带: Color颜色:Natural透明色, 厚度0.40mm最小
5. Thickness=0.40±0.05; 材料厚度为0.40±0.05mm
6. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

	Pin No.	W	S	F	T	G	Cover Tape (宽度) 上带(W)	Carrier Tape(Color) 下带(颜色)	REEL PCS	CARTON R	CARTON PCS
ZD1515WRS-XXHF	ZD1515WRS-02HF 2Pin~6pin	24	/	11.50	28.50	24.40	21.3		500	12R	6000
1515WRS-XX-XXXX	ZD1515WRS-07HF 7Pin~9Pin	32	28.40	14.20	36.50	32.40	25.5	透明色	500	9R	4500
	ZD1515WRS-10HF 10Pin~15 Pin	44	40.40	20.20	48.50	44.40	37.5		500	7R	3500

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.:

PPN: 1515WRS-XX-XXXX
CTN: ZD1515WRS-XXHF

TITLE:

1.50mm SMT 90° Packing

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE REV ECN NO. DESCRIPTION

MODIFY APPROVAL

1

2

3

4

5

6

7

8