



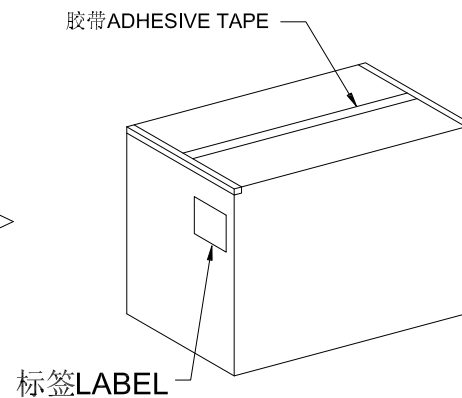


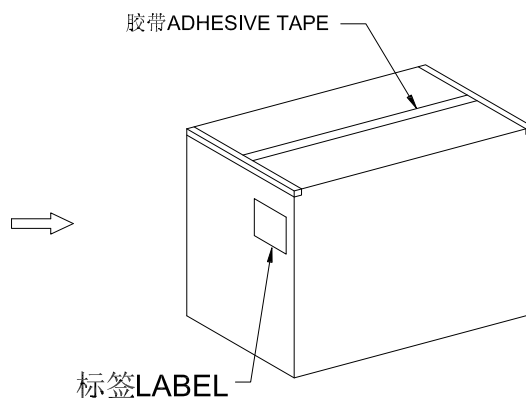
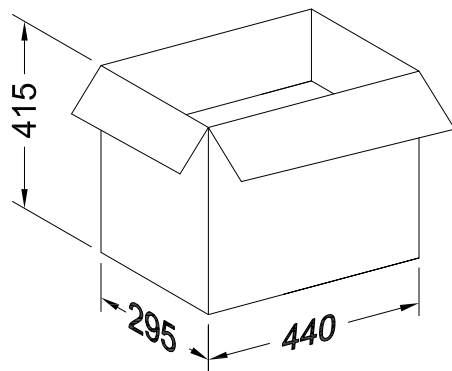


Note注解:

1. Place Housing into PE bag and seal PE bag. Label.
将 Housing放入PE袋内, 并将PE袋封好.贴上标签.
2. Put PE bag packed products in cartons, Packing detail see the table below
将装好产品的PE袋放入纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
5. Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

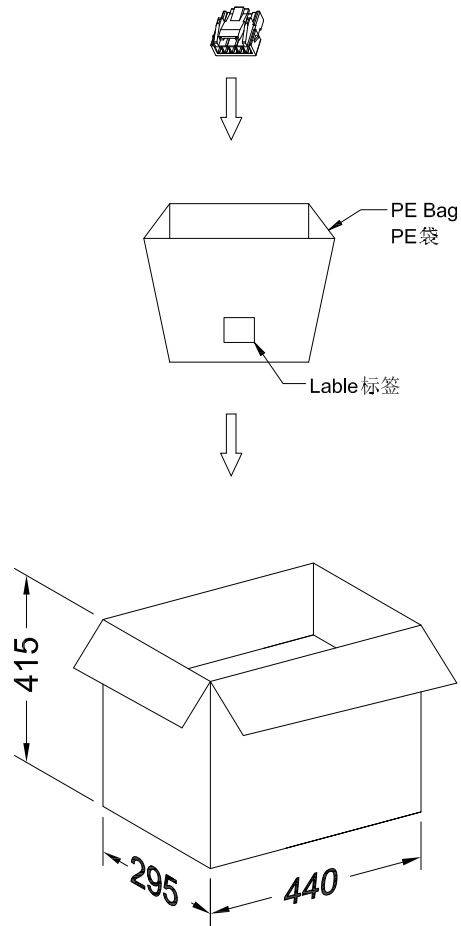

Poles	Bag PCS
02	1000
03	1000
04	1000
05	1000
06	1000
07	1000
08	1000
09	1000
10	1000
11	1000
12	1000
13	1000
14	1000
15	1000

						GENERAL TOLERANCE		<div><div><div>GYA</div><div>Connectors</div></div><div>东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.</div></div>				PART NO. 2019H-1xXX-N0NBR01Q				
						.X ±0.35	.XX ±0.25					.XXX ±0.15	TITLE:			
						<div>X° ±0.2°</div>		APPROVAL	CHECK	DRAWN	DATE	2.00mm Housing Packing				
						<div>视 角</div> <div></div>		Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL							mm	1 : 1	1/1	A0	A-022





Note注解:

1. Place Housing into PE bag and seal PE bag. Label.
将 Housing放入PE袋内, 并将PE袋封好.贴上标签.
2. Put PE bag packed products in cartons, Packing detail see the table below
将装好产品的PE袋放入纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
5. Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm



Poles	Bag PCS
02	1000
03	1000
04	1000
05	1000
06	1000
07	1000
08	1000
09	1000
10	1000
11	1000
12	1000
13	1000
14	1000
15	1000

						GENERAL TOLERANCE		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.				PART NO. C2019-1xxx-N0NBR01Q				
						.X	±0.35					TITLE:				
						.XX	±0.25	APPROVAL				2.00mm TAP Packing				
						.XXX	±0.15					UNIT	SCALE	SHEET	REV	NUMBER
						X°	±0.2°					mm	1:1	1/1	A0	A-022
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	视图		Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26					

- 1.Quantity 数量:
8K PCS/REEL 一卷8K/PCS
8K REEL/BOX 一箱8卷
64K PCS/BOX 一箱64K/PCS
- 2.Each reel and outer box must be labeled and Eco-Label Respectively labeled
每盘和外箱都必须有标签及环保标签分别标示
- 3.Terminal winding direction as shown
端子缠绕方向如左图所示
- 4.There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
- 5.Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

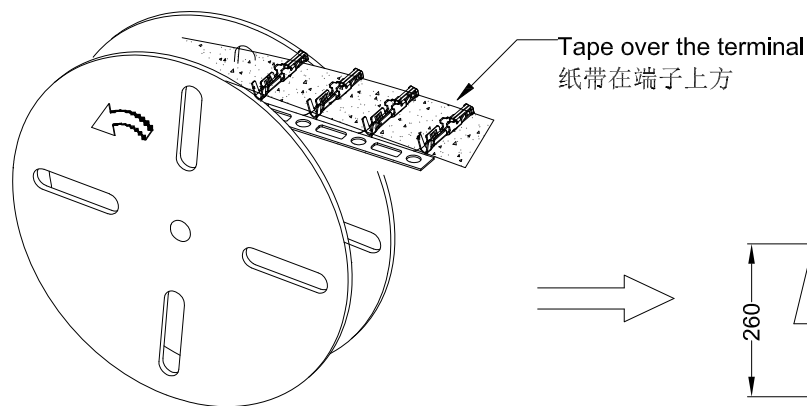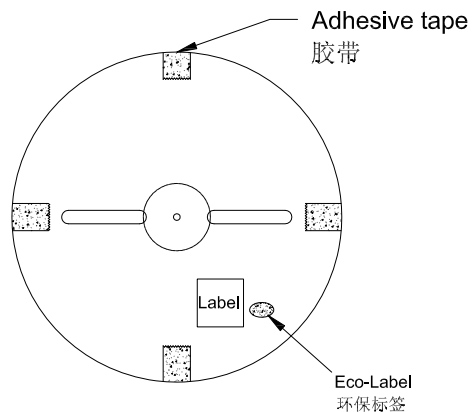






卷装方式
Package way

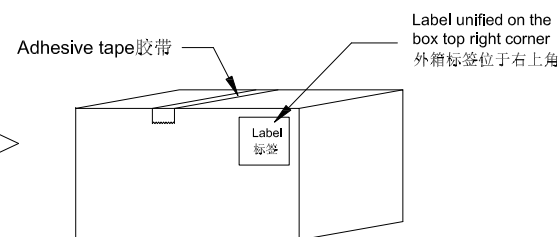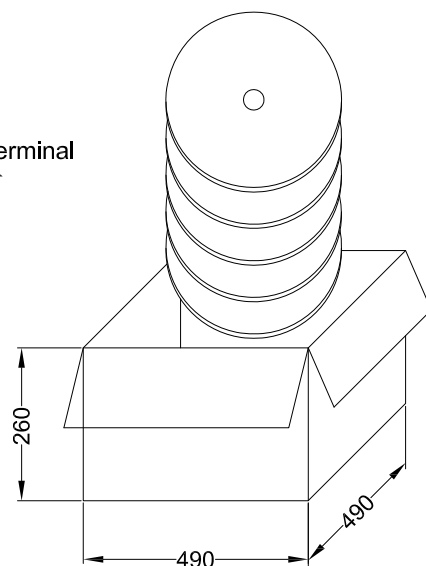

						GENERAL TOLERANCE	<div> <div>GYA</div> <div>Connectors</div> <div> <div>东莞市国亚电子有限公司</div> <div>Dong Guan Guo Ya Connectors co., ltd.</div> </div> </div>				PART NO.				
						.X ±0.35					2019T-XXXXX-XXQ				
						.XX ±0.25	<div>APPROVAL</div> <div>CHECK</div> <div>DRAWN</div> <div>DATE</div>				TITLE:				
						.XXX ±0.15					2.00mm Terminal Packing				
						X° ±0.2°	<div>Yangzhengguo</div> <div>Yangzhengyi</div> <div>Lvtiansheng</div> <div>2016/08/26</div>				UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	<div> <div>视</div> <div>角</div> <div> </div> </div>					mm	1 : 1	1/1	A0	A-000



RoHS

包装图

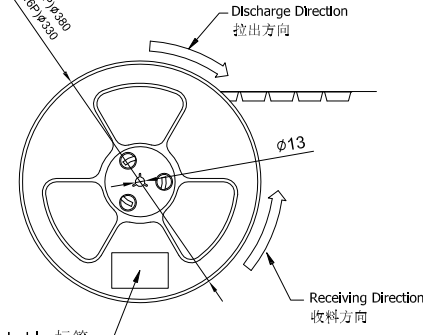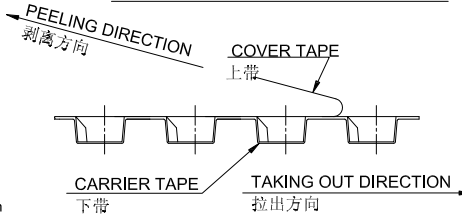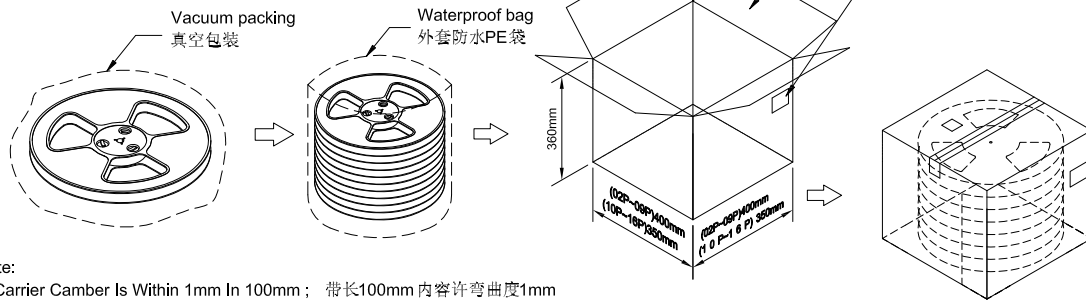(02P~09P) 后空12穴192mm
(10P~16P) 后空16穴256mm(02P~09P) 900 PCS 载带实用长度14400mm
(10P~16P) 500 PCS 载带实用长度8000mm(02P~09P) 前空30穴480mm
(10P~16P) 前空30穴480mmCOVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minuteLable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

Note:

- Carrier Camber Is Within 1mm In 100mm; 带长100mm 内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
- Materiaal for PS; 材质为PS材质; Color 颜色:Natural 本色透明色
- bracer 保护带; Color 颜色:Natural 透明色; 厚度0.40mm 最小
- Thinkess=0.40 ± 0.05 ; 材料厚度为0.40 ± 0.05 mm
- Cover Tape 上带: 冷封
- Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

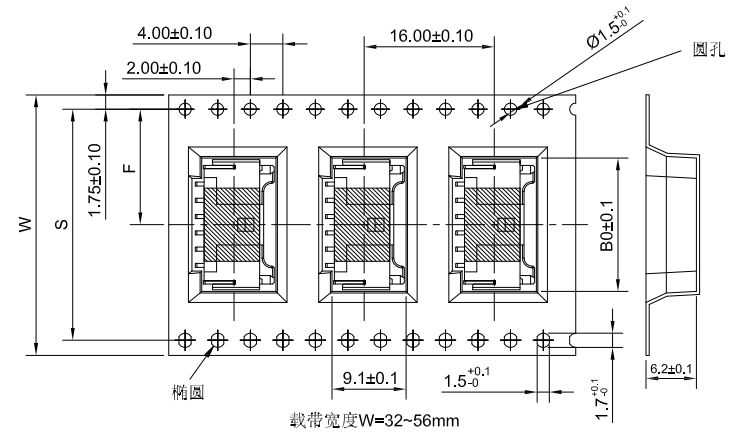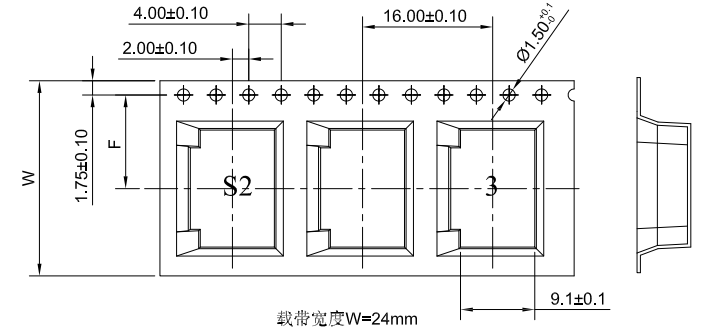

Carrier Tape No. 载带料号	WS	F	T	G	B0	REEL /PCS	CARTON /R	CARTON /PCS
ZD2000WRS-02HF	24	/	11.50	28.5	24.5	8.4	900	12
ZD2000WRS-03HF						10.4		
ZD2000WRS-04HF						12.4		
ZD2000WRS-05HF						14.4		
ZD2000WRS-06HF	32	28.4	14.20	36.5	32.5	16.4	900	9
ZD2000WRS-07HF						18.4		
ZD2000WRS-08HF						20.4		
ZD2000WRS-09HF						22.4		
ZD2000WRS-10HF	44	40.4	20.2	48.5	44.5	24.4	900	7
ZD2000WRS-11HF						26.4		
ZD2000WRS-12HF						28.4		
ZD2000WRS-13HF						30.4		
ZD2000WRS-14HF	56	52.4	26.2	60.5	56.5	32.4	500	5
ZD2000WRS-15HF						34.4		
ZD2000WRS-16HF						36.4		
ZD2000WRS-17HF						38.4		

ZD2000WRS-XXHF
2000WRS-XX-XXXXXXX-X

GENERAL TOLERANCE

.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X° $\pm 0.2^\circ$

视 角

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

PPN: 2000WRS-XX-XXXXXXX-X
CTN: ZD2000WRS-XXHF

TITLE:

2.00mm Connectors 90° Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

JA-000

DATE

REV



ECN NO.

DESCRIPTION





MODIFY

APPROVAL


RoHS 包装图

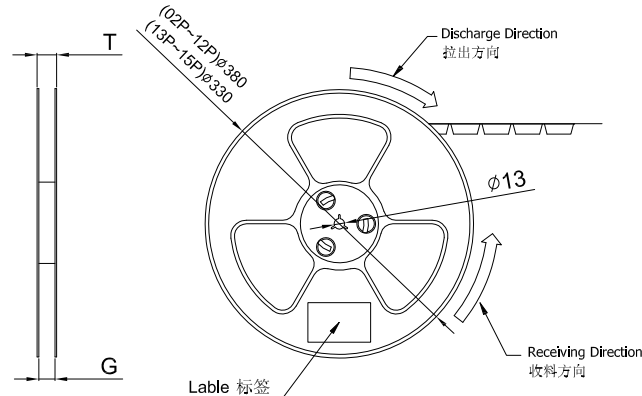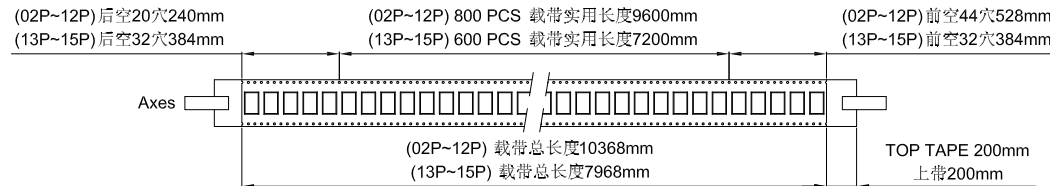


COVER TAPE PEEL STRENGTH:30~80g
上带剥离力量: 30~80g
速度 PEEL SPEED:300mm/minute

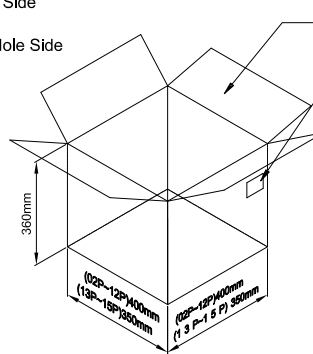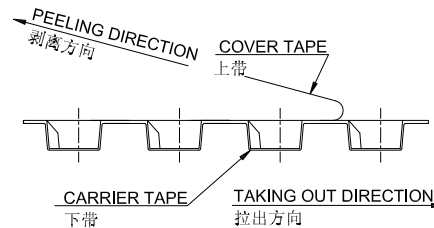

- Note:
1. Carrier Camber Is Within 1mm In 100mm; 带长100mm 内容许弯曲度1mm
 2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距距离累计允许公差为±0.2mm
 3. Material for PS; 材质为PS材质; Color 颜色: Natural 透明色
 4. bracer 保护带: Color 颜色: Natural 透明色; 厚度0.40mm 最小
 5. Thickness=0.50±0.05; 材料厚度为0.50±0.05mm
 6. Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm

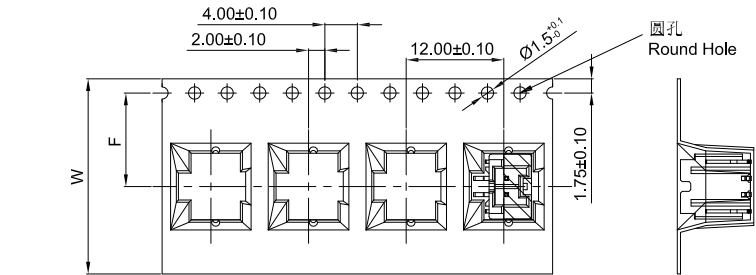

WIDTH=24mm

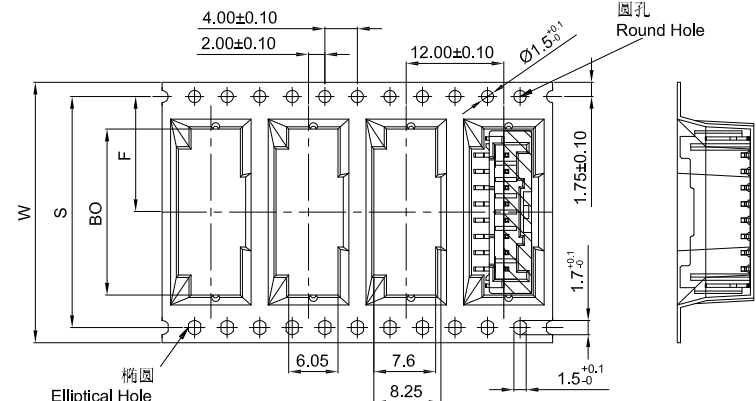

WIDTH=32~56mm

Carrier Tape No. 载带料号	B0	WS		F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
ZD2000WVS-02HF	8.3	24	/	11.50	28.5	24.5	800	12	9600
ZD2000WVS-03HF	10.3								
ZD2000WVS-04HF	12.3								
ZD2000WVS-05HF	14.3								
ZD2000WVS-06HF	16.3	32	28.4	14.20	36.5	32.5	800	9	7200
ZD2000WVS-07HF	18.3								
ZD2000WVS-08HF	20.3								
ZD2000WVS-09HF	22.3								
ZD2000WVS-10HF	24.3	44	40.4	20.2	48.5	44.5	800	7	5600
ZD2000WVS-11HF	26.3								
ZD2000WVS-12HF	28.3								
ZD2000WVS-13HF	30.3								
ZD2000WVS-14HF	32.3	56	52.4	26.2	60.5	56.5	600	5	3000
ZD2000WVS-15HF	34.3								

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

⊕ ⊖

GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

PPN: 2000WVS-XX-XXXXXX-X
CTN: ZD2000WVS-XXHF

TITLE:

2.00mm Connectors 180° Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

IA-000

DATE


REV

ECN NO.



DESCRIPTION

MODIFY

APPROVAL


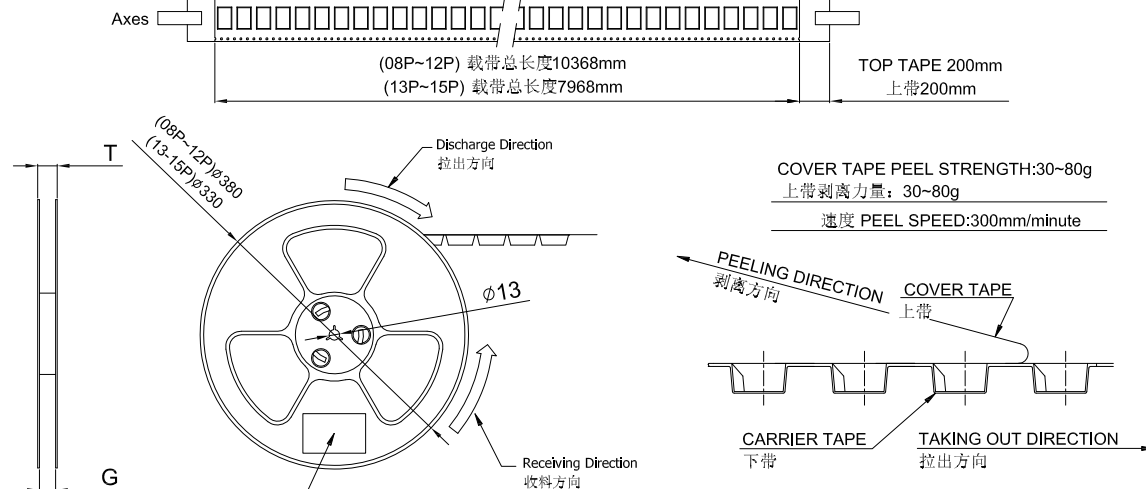


Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

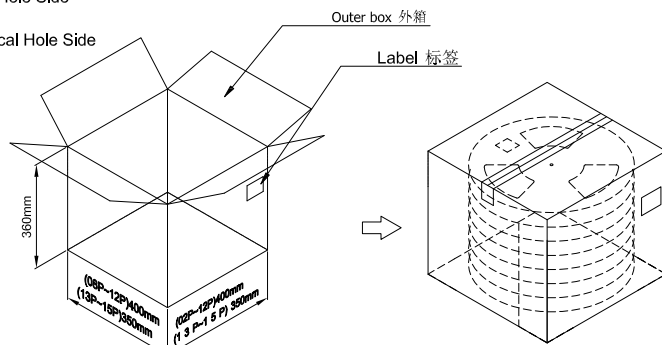

Note:

1. Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 mm; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Carrier tape Material for PS; 下带材质为PS材质; Color颜色: Natural透明色
4. Bracer保护带: Color颜色: Natural透明色; 厚度0.40mm最小
5. Thickness=0.50 ± 0.05 ; 材料厚度为0.50 ± 0.05 mm
6. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

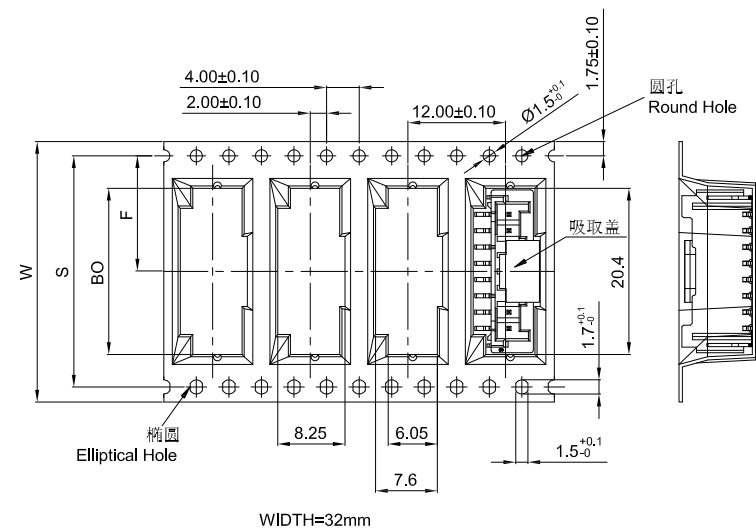

ZD2000WVS-XXCHF 2000WVS-XXC-XXXXXXXX-X	Carrier Tape No.	B0	WS		F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
	ZD2000WVS-08CHF	20.3	32	28.4	14.20	36.5	32.5	800	9	7200
	ZD2000WVS-09CHF	22.3	44	40.4	20.2	48.5	44.5	800	7	5600
	ZD2000WVS-10CHF	24.3								
	ZD2000WVS-11CHF	26.3								
	ZD2000WVS-12CHF	28.3								
	ZD2000WVS-13CHF	30.3								
	ZD2000WVS-14CHF	32.3	56	52.4	26.2	60.5	56.5	600	5	3000
	ZD2000WVS-15CHF	34.3								

						<div> <div> <div>GENERAL TOLERANCE</div> <div> .X ±0.30 .XX ±0.20 .XXX ±0.10 X° ±0.2° </div> </div> <div> <div> <div>GYA</div> <div>Connectors</div> </div> <div> <div>东莞市国亚电子有限公司</div> <div>Dong Guan Guo Ya Connectors co., Ltd.</div> </div> </div> </div>				<div> <div>PART NO.</div> <div>PPN: 2000WVS-XXC-XXSWXX-X</div> <div>CTN: ZD2000WVS-XXCHF</div> </div>				
						<div> <div>APPROVAL</div> <div>CHECK</div> <div>DRAWN</div> <div>DATE</div> </div>				<div> <div>TITLE:</div> <div>2.00mm Connectors 180° Packing</div> </div>				
						<div> <div>Yangzhengguo</div> <div>Yangzhengyi</div> <div>Lvtiansheng</div> <div>2016/08/26</div> </div>				UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL					mm	1:1	1/1	A0	CA-000