
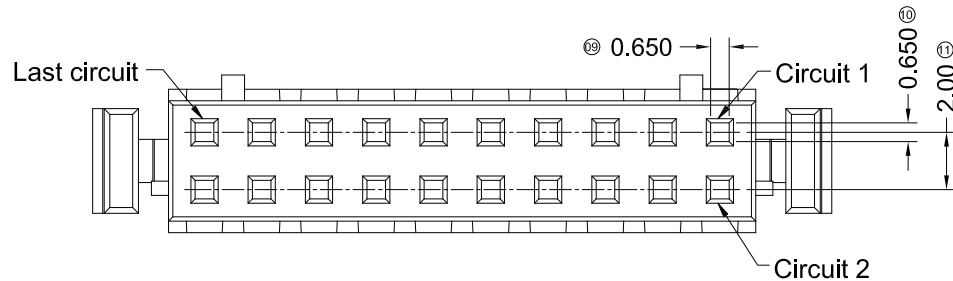
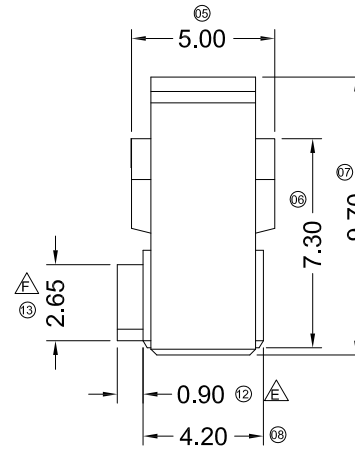
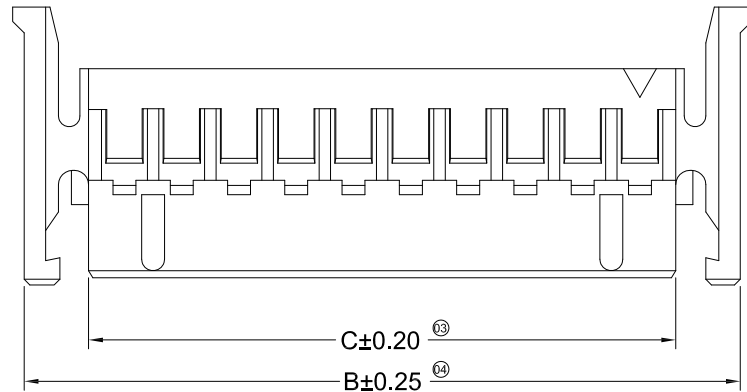
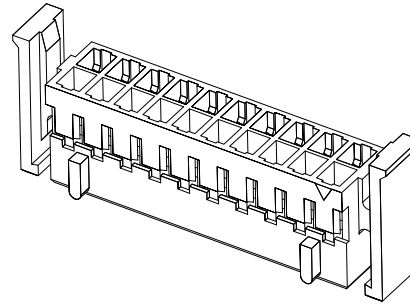


RoHS

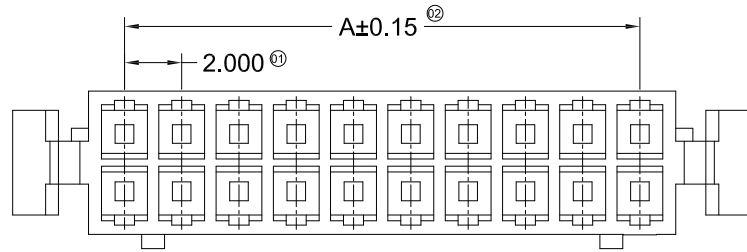

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Suitable GYA Terminal : 2026T
- Suitable GYA Wafer : 2026W-A

2026 H X-2*XX AH-N0 XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type : Blank-Ordinary
- ④ Row No.-Pin No. : 2*XX-2*02P~2*20P
- ⑤ Special No. : A-With Lock; H-High Salient Point
- ⑥ Material: N0-PA66 94V-0
- ⑦ Color: Blank-Natural Color

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	9.00	4.50	2*12	22.00	29.00	24.50
2*03	4.00	11.00	6.50	2*13	24.00	31.00	26.50
2*04	6.00	13.00	8.50	2*14	26.00	33.00	28.50
2*05	8.00	15.00	10.50	2*15	28.00	35.00	30.50
2*06	10.00	17.00	12.50	2*16	30.00	37.00	32.50
2*07	12.00	19.00	14.50	2*17	32.00	39.00	34.50
2*08	14.00	21.00	16.50	2*18	34.00	41.00	36.50
2*09	16.00	23.00	18.50	2*19	36.00	43.00	38.50
2*10	18.00	25.00	20.50	2*20	38.00	45.00	40.50
2*11	20.00	27.00	22.50				



GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

PROJECT



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2026H-2*XXAH-N0

TITLE

2.00mm Crimp Style Connectors

UNIT

SCALE

SHEET

REV

NUMBER

mm

1 : 1

1/1

A0

A-009

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4





5

6

7

8

RoHS

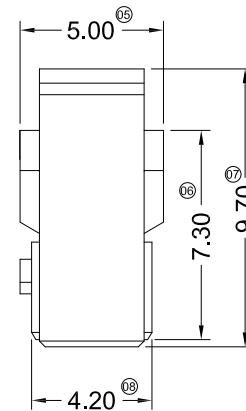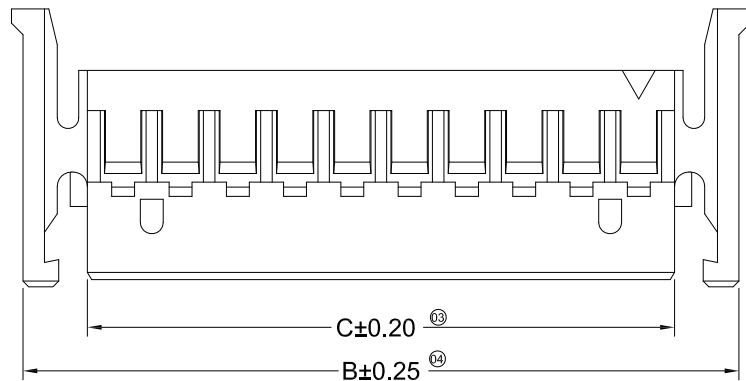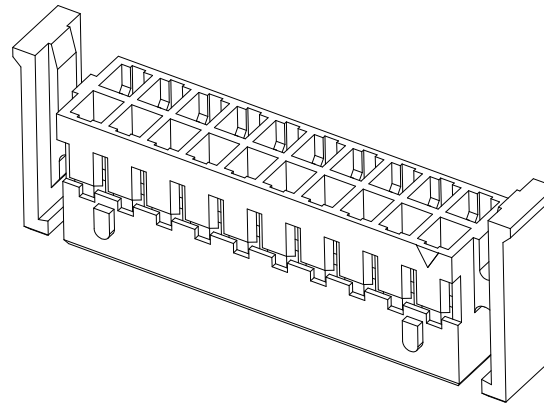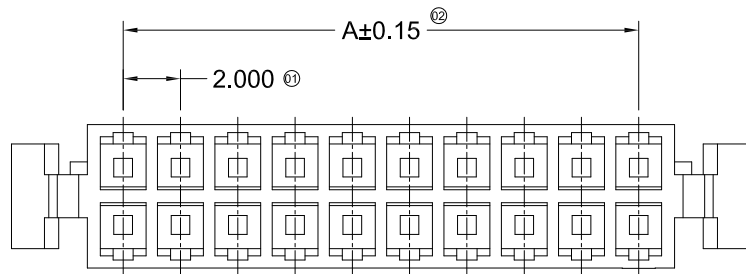

Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Suitable GYA Terminal : 2026T
- Suitable GYA Wafer : 2026W-A



2026 H X-2*XX A-N0 XX

① ② ③ ④ ⑤ ⑥ ⑦



- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: 2*XX-2*02P~2*20P
- ⑤ Special No.: A-With Lock
- ⑥ Material: N0-PA66 94V-0
- ⑦ Color: Blank-Natural Color; BW-Beige White

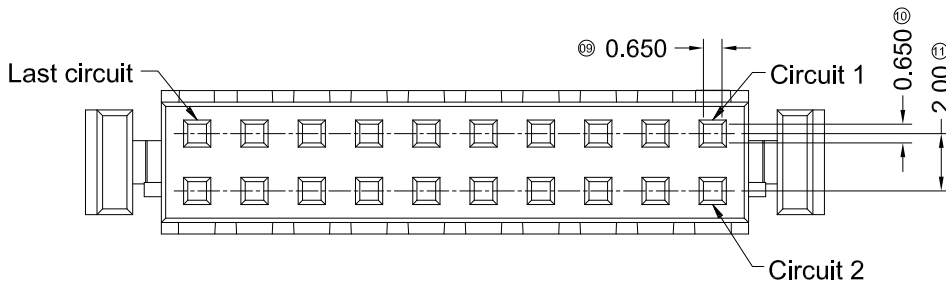


Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	9.00	4.50	2*12	22.00	29.00	24.50
2*03	4.00	11.00	6.50	2*13	24.00	31.00	26.50
2*04	6.00	13.00	8.50	2*14	26.00	33.00	28.50
2*05	8.00	15.00	10.50	2*15	28.00	35.00	30.50
2*06	10.00	17.00	12.50	2*16	30.00	37.00	32.50
2*07	12.00	19.00	14.50	2*17	32.00	39.00	34.50
2*08	14.00	21.00	16.50	2*18	34.00	41.00	36.50
2*09	16.00	23.00	18.50	2*19	36.00	43.00	38.50
2*10	18.00	25.00	20.50	2*20	38.00	45.00	40.50
2*11	20.00	27.00	22.50				

							GENERAL TOLERANCE		<div><div><div>GYA</div><div>Connectors</div></div><div>东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.</div></div>				PART NO. 2026H-2*XXA-N0XXX				
							.X ±0.30	.XX ±0.20									
							.XXX ±0.10	X.° ±2°					TITLE 2.00mm Crimp Style Connectors				
							PROJECT		APPROVAL	CHECK	DRAWN	DATE					
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL				Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET	REV	NUMBER
													mm	1 : 1	1/1	A0	A-089
1		2		3		4		5		6		7		8			



RoHS

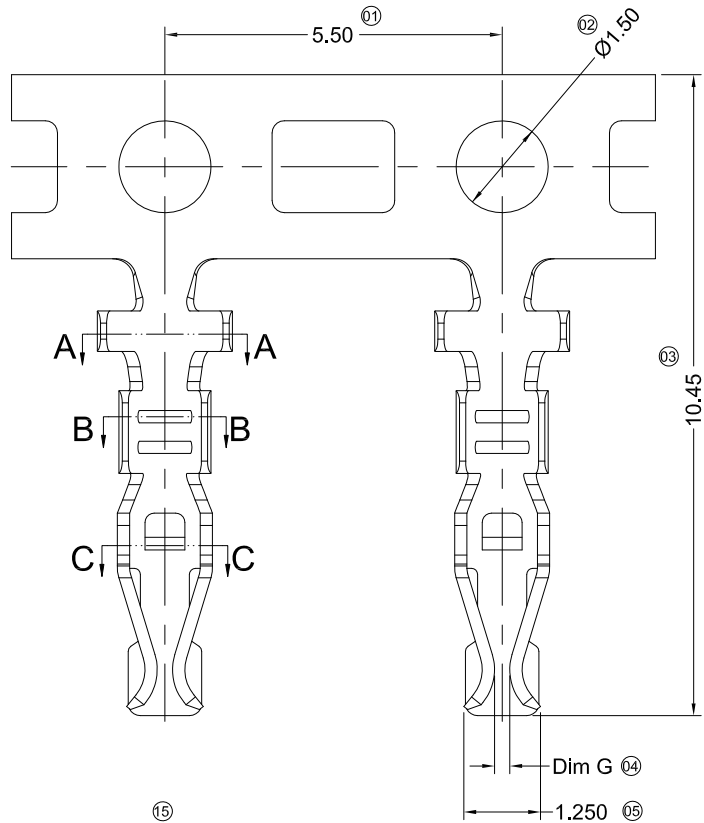

SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1

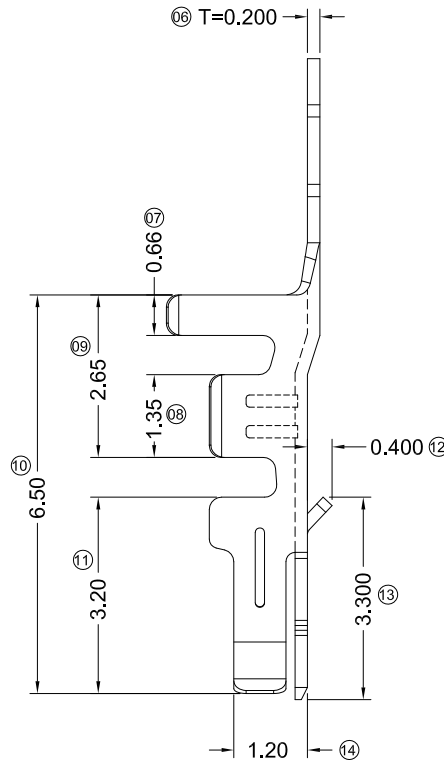

SECTION: C-C
SCALE: 1:1



Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

- Wire Size:AWG#22~28
- Insulation O.D.: 1.50mm (Max)
- Used In GYA Housing : 2026H、2026H-A

2026 T X-P XXX X - X
① ② ③ ④ ⑤ ⑥ ⑦



- ① Series Number
- ② Category: T-terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating Code: SN-Bright tin ; V01-Gold Flash
G03-Gold 3u" Plated Contact
- ⑥ Plating method: Blank-Stamping before plating
B-Plating before stamping
- ⑦ Mold No./Mark/Special No.: T- Tight L- Loose

Dimensions "G"(mm)	
2026T-PXXX-T	0.25mm
2026T-PXXX-L	0.33mm

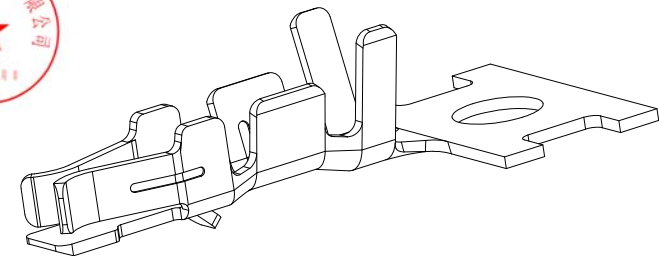


						GENERAL TOLERANCE				PART NO.			
						.X ± 0.30				2026T-PXXX-X			
						.XX ± 0.20				TITLE			
						.XXX ± 0.10				2.00mm Crimp Style Connectors			
						X.° $\pm 2^\circ$				UNIT			
						PROJECT				SCALE			
						APPROVAL				SHEET			
						CHECK				REV			
						DRAWN				NUMBER			
						DATE							
						Yangzhengguo				mm			
						Yangzhengyi				1:1			
						Lvtiansheng				1/1			
						2016/08/26				A0			
										A-000			


RoHS

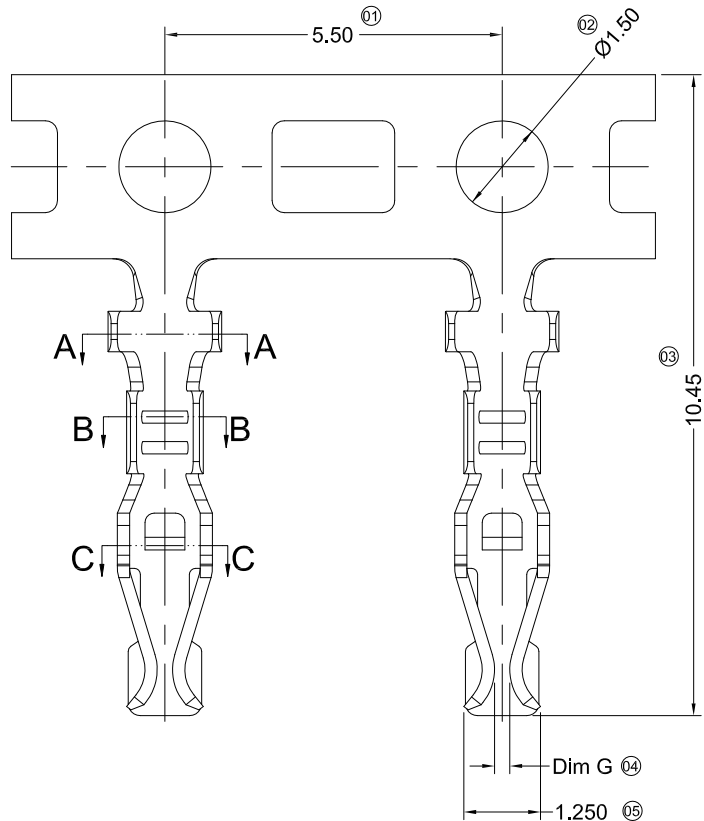


SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1



SECTION: C-C
SCALE: 1:1

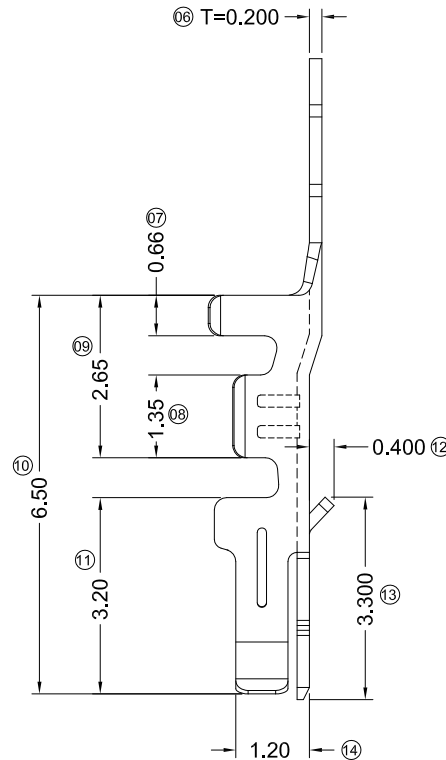

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$


- Wire Size:AWG#28~32
- Insulation O.D.: 1.00mm (Max)
- Used In GYA Housing : 2026H、2026H-A


2026 T L-P XXX X - X

① ② ③ ④ ⑤ ⑥ ⑦




- ① Series Number
- ② Category: T-terminal
- ③ Shape: L-Lower Crimp
- ④ Material: P-Phosphor bronze
- ⑤ Plating Code: SN-Bright tin ; V01-Gold Flash
G03-Gold 3u" Plated Contact
- ⑥ Plating method: Blank-Stamping before plating
B-Plating before stamping
- ⑦ Mold No./Mark/Special No.: T- Tight L- Loose

Dimensions "G"(mm)	
2026TL-PXXX-T	0.25mm
2026TL-PXXX-L	0.33mm

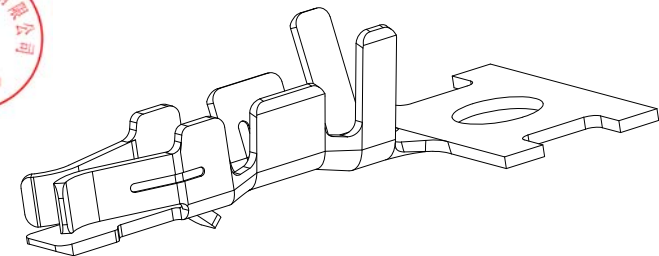

						GENERAL TOLERANCE		<div><div><div>GYA</div><div>Connectors</div></div><div>东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.</div></div>				PART NO. 2026TL-PXXX-X				
						.X ±0.30						TITLE 2.00mm Crimp Style Connectors				
						.XX ±0.20										
						.XXX ±0.10										
						X.° ±2°		APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 		Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	mm	1 : 1	1/1	A0	A-000
1		2		3		4		5		6		7		8		

RoHS

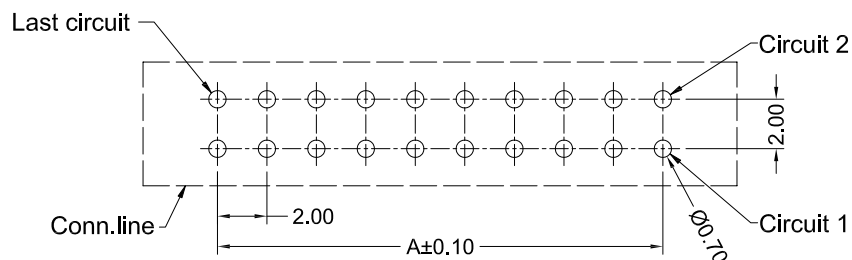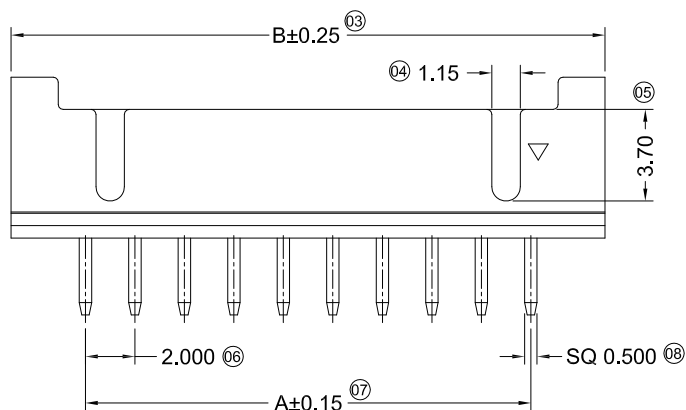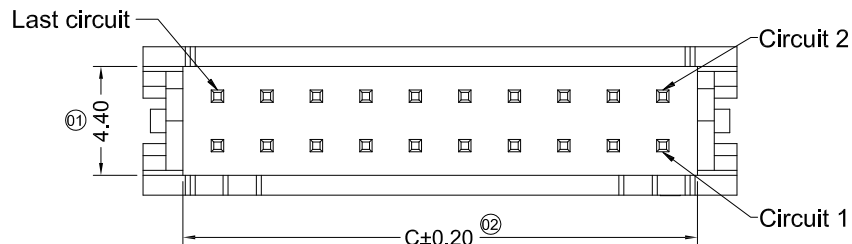

Recommended P.C.B Layout
General Tolerance±0.05

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Material(Pin):Brass
- Mates With GYA Housing:2026H-AH

2026 W V X-2*XX A1H -9T SN XX

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ① Series No.
② Category: W-Wafer
③ Connector Type: V-Straight 180°
④ Mounting Type: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-2*02P~2*20P
⑥ Special No.:
A1H-With Lock on both side,Wall Thickness6.00mm
Deep groove
⑦ Material: 9T-PA9T 94V-0;
⑧ Plating Code: SN-Bright Tin
⑨ Color: Blank-Natural Color

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	8.00	4.80	2*12	22.00	28.00	24.80
2*03	4.00	10.00	6.80	2*13	24.00	30.00	26.80
2*04	6.00	12.00	8.80	2*14	26.00	32.00	28.80
2*05	8.00	14.00	10.80	2*15	28.00	34.00	30.60
2*06	10.00	16.00	12.80	2*16	30.00	36.00	32.80
2*07	12.00	18.00	14.80	2*17	32.00	38.00	34.80
2*08	14.00	20.00	16.80	2*18	34.00	40.00	36.80
2*09	16.00	22.00	18.80	2*19	36.00	42.00	38.80
2*10	18.00	24.00	20.80	2*20	38.00	44.00	40.80
2*11	20.00	26.00	22.80				



GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

PROJECT

GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2026WV-2*XXA1H-9TSN

TITLE





2.00mm Crimp Style Connectors

UNIT	SCALE	SHEET	REV	NUMBER
mm	1 : 1	1/1	A0	A-053

DATE REV ECN NO. DESCRIPTION MODIFY APPROVAL

1 2 3 4 5 6 7 8

RoHS

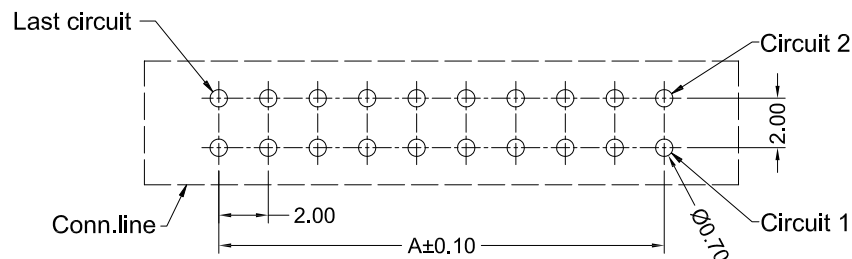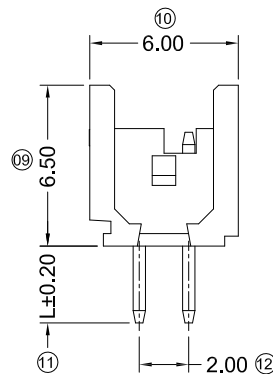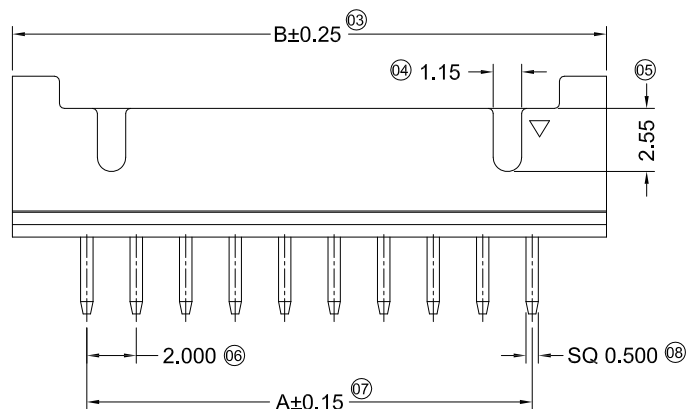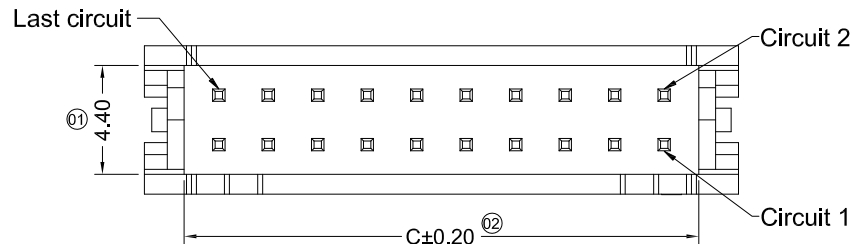

Recommended P.C.B Layout
General Tolerance±0.05

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Material(Pin):Brass
- Mates With GYA Housing:2026H-A

2026 W V X-2*XX A1 -9T SN XX -XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: W-Wafer
③ Connector Type: V-Straight 180°
④ Mounting Type: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-2*02P~2*20P
⑥ Special No.:
A1-With Lock on both side,Wall Thickness6.00mm
⑦ Material: 9T-PA9T 94V-0
⑧ Plating Code: SN-Bright Tin
⑨ Color: Blank-Natural Color
⑩ Blank-L=3.10mm
01-L=2.60mm

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	8.00	4.80	2*12	22.00	28.00	24.80
2*03	4.00	10.00	6.80	2*13	24.00	30.00	26.80
2*04	6.00	12.00	8.80	2*14	26.00	32.00	28.80
2*05	8.00	14.00	10.80	2*15	28.00	34.00	30.60
2*06	10.00	16.00	12.80	2*16	30.00	36.00	32.80
2*07	12.00	18.00	14.80	2*17	32.00	38.00	34.80
2*08	14.00	20.00	16.80	2*18	34.00	40.00	36.80
2*09	16.00	22.00	18.80	2*19	36.00	42.00	38.80
2*10	18.00	24.00	20.80	2*20	38.00	44.00	40.80
2*11	20.00	26.00	22.80				

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

PROJECT

GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

PART NO.

2026WV-2*XXA1-9TSN-XX

TITLE

2.00mm Crimp Style Connectors

UNIT

SCALE

SHEET

REV

NUMBER

mm

1 : 1

1/1

A0

A-053

DATE

1

REV

2

ECN NO.

DESCRIPTION

3

MODIFY

4

APPROVAL

5

Yangzhengguo

6

Yangzhengyi





7

Lvtiansheng

8

2016/08/26

RoHS

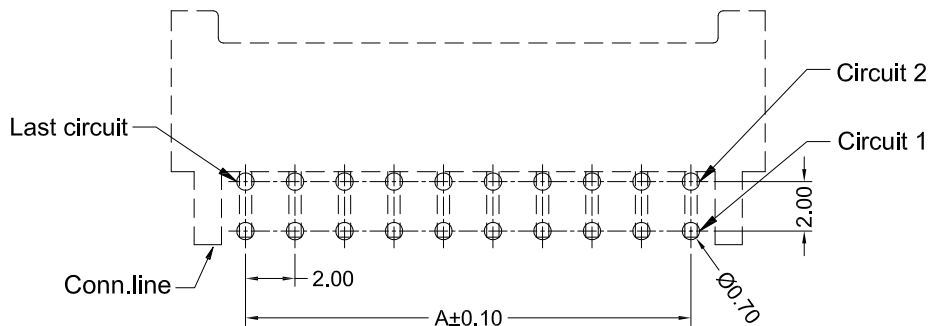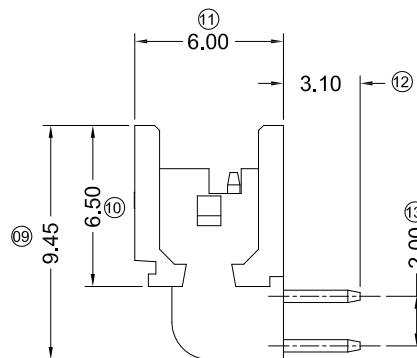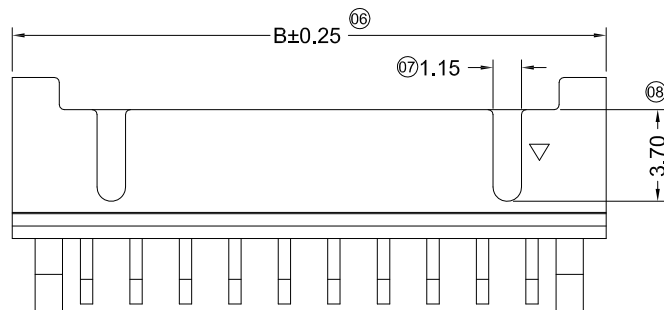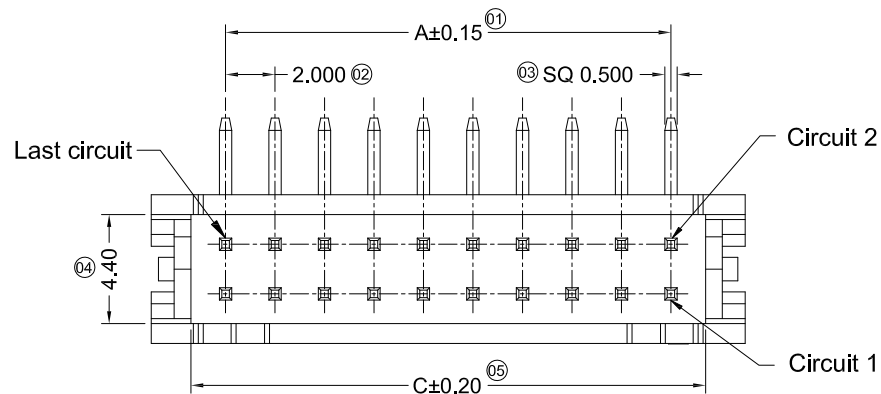

Recommended P.C.B Layout
General Tolerance±0.05

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Material(Pin):Brass
- Mates With GYA Housing: 2026H-2*XXAH

2026 W R X-2*XX A1H -9T SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: R-Right Angle 90°
- ④ Mounting Type: Blank-DIP
- ⑤ Row No.-Pin No.: 2*XX-2*02P~2*20P
- ⑥ Special No.:
A1H- With Lock on both side,Wall Thickness6.00mm
Deep groove
- ⑦ Material: 9T-PA9T 94V-0;
- ⑧ Plating Code: SN-Bright Tin
- ⑨ Color: Blank-Natural Color

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	8.00	4.80	2*12	22.00	28.00	24.80
2*03	4.00	10.00	6.80	2*13	24.00	30.00	26.80
2*04	6.00	12.00	8.80	2*14	26.00	32.00	28.80
2*05	8.00	14.00	10.80	2*15	28.00	34.00	30.60
2*06	10.00	16.00	12.80	2*16	30.00	36.00	32.80
2*07	12.00	18.00	14.80	2*17	32.00	38.00	34.80
2*08	14.00	20.00	16.80	2*18	34.00	40.00	36.80
2*09	16.00	22.00	18.80	2*19	36.00	42.00	38.80
2*10	18.00	24.00	20.80	2*20	38.00	44.00	40.80
2*11	20.00	26.00	22.80				

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

PROJECT



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2026WR-2*XXA1H-9TSN

TITLE

2.00mm Crimp Style Connectors

UNIT

SCALE

SHEET

REV

NUMBER

mm

1 : 1

1/1

A0

A-053

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4





5

6

7

8

RoHS

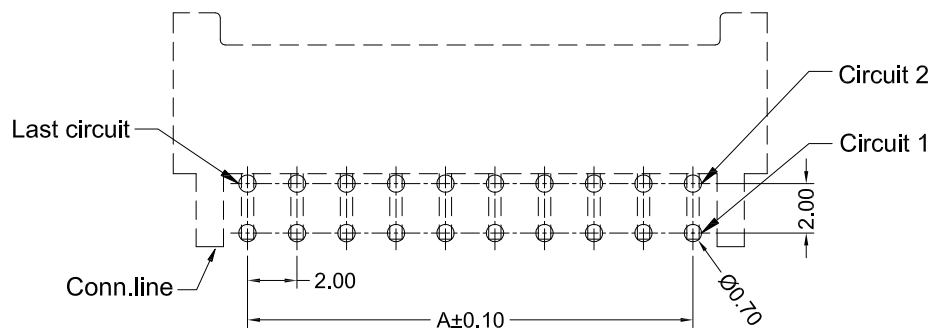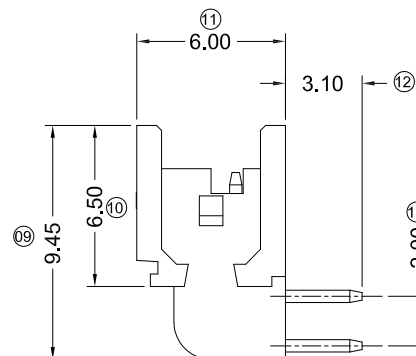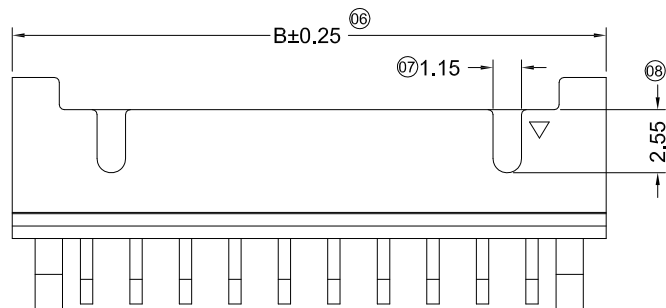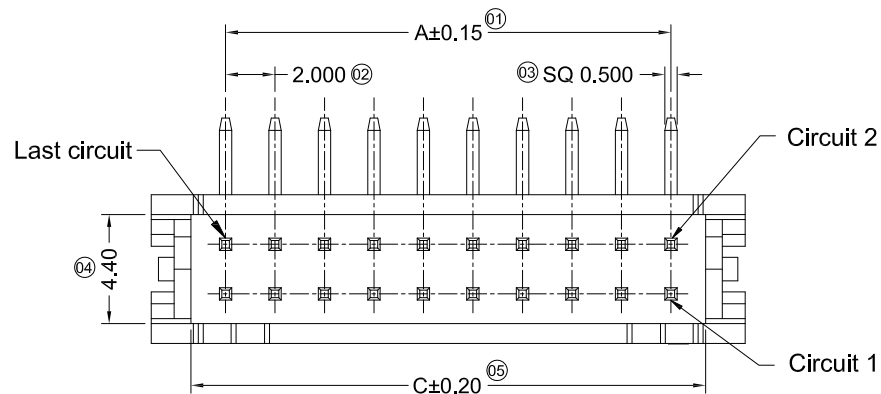

Recommended P.C.B Layout
General Tolerance±0.05

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Material(Pin):Brass
- Mates With GYA Housing: 2026H-2*XXA

2026 W R X-2*XX A1 -9T SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category: W-Wafer
③ Connector Type: R-Right Angle 90°
④ Mounting Type: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-2*02P~2*20P
⑥ Special No.:
A1- With Lock on both side,Wall Thickness6.00mm
⑦ Material: 9T-PA9T 94V-0;
⑧ Plating Code: SN-Bright Tin
⑨ Color: Blank-Natural Color

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	8.00	4.80	2*12	22.00	28.00	24.80
2*03	4.00	10.00	6.80	2*13	24.00	30.00	26.80
2*04	6.00	12.00	8.80	2*14	26.00	32.00	28.80
2*05	8.00	14.00	10.80	2*15	28.00	34.00	30.60
2*06	10.00	16.00	12.80	2*16	30.00	36.00	32.80
2*07	12.00	18.00	14.80	2*17	32.00	38.00	34.80
2*08	14.00	20.00	16.80	2*18	34.00	40.00	36.80
2*09	16.00	22.00	18.80	2*19	36.00	42.00	38.80
2*10	18.00	24.00	20.80	2*20	38.00	44.00	40.80
2*11	20.00	26.00	22.80				

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

PROJECT



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2026WR-2*XXA1-9TSN

TITLE

2.00mm Crimp Style Connectors

UNIT	SCALE	SHEET	REV	NUMBER
mm	1 : 1	1/1	A0	A-053

DATE REV ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1 2 3 4 5 6 7 8