

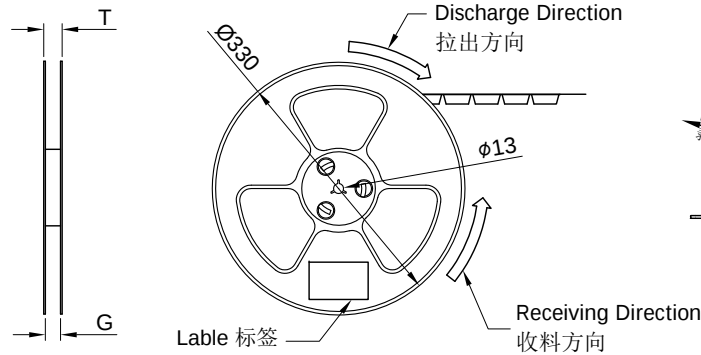
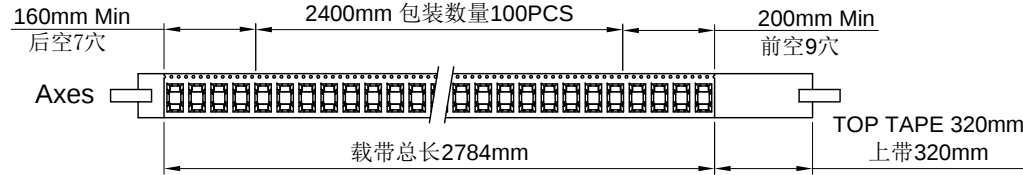
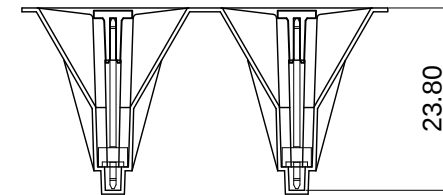
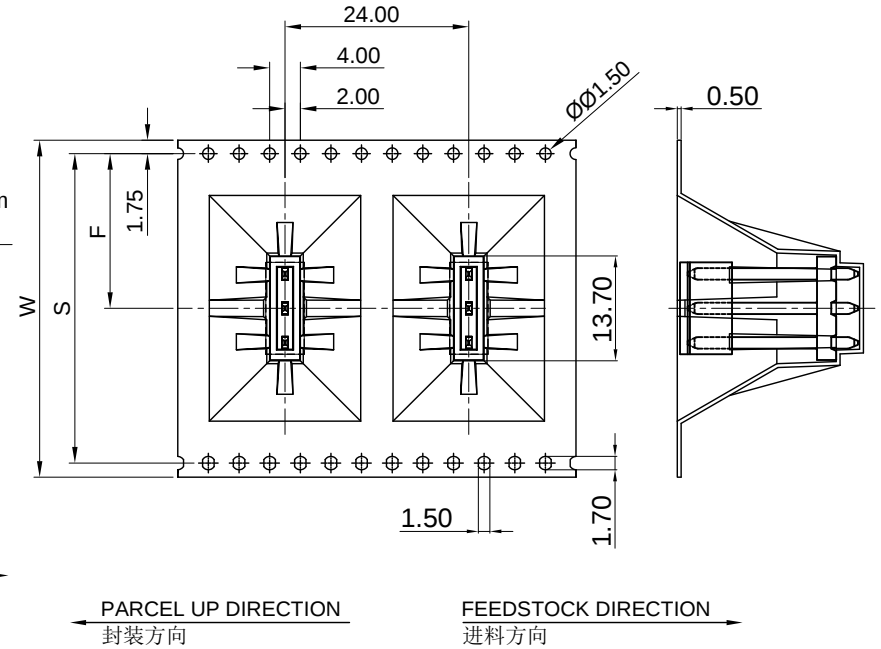
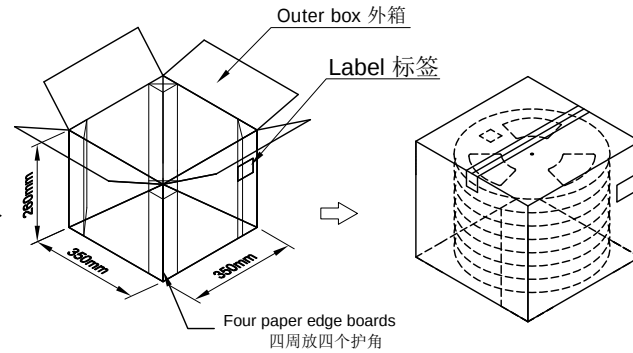


RoHS

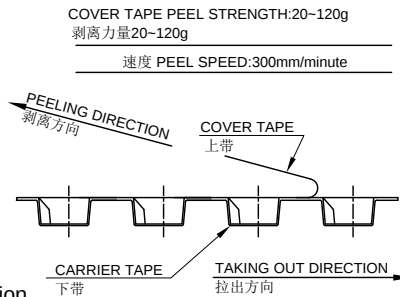

Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧



Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
3. Carrier tape Material for PS ; 下带材质为PS材质; Color颜色: Black 黑色; Static-Free 防静电
4. Bracer保护带: Color颜色: Black 黑色; 厚度0.40mm最小
5. Thinkess=0.50±0.05 ; 材料厚度为0.50±0.05mm
6. Carton material纸箱材质:K=K; Carton Thickness纸箱厚度: 6±1mm

4500WV-03-4TS40BKR	Carrier Tape No.	W	S	F	T	G	Cover Tape(W) 上带(宽度)	Carrier Tape(Color) 下带(颜色)	REEL /PCS	CARTON /R	CARTON /PCS
	ZD4500WV-03BK-SFHF	44	40.4	20.2	48.50	44.50	37.5	黑色	100	5R	500

GENERAL
TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10



东莞市国亚电子有限公司
DONGGUO GUOYA ELECTRONICS CO.,LTD

PART NO. CTN: ZD4500WV-03BK-SFHF
CPN: 4500WV-03-4TS40BKR

TITLE Pin Header 3Pins 180° connectors Package



APPROVAL

CHECK

DRAWN

DATA

UNIT
mm

SCALE
1:1

NUMBER
A-000

REV
A0

DATE

OLD REV

NEW REV

ECN

DESCRIPTION

CHECK

APPROVAL


YANG

TIAN

TIAN

2017/08/08

RoHS

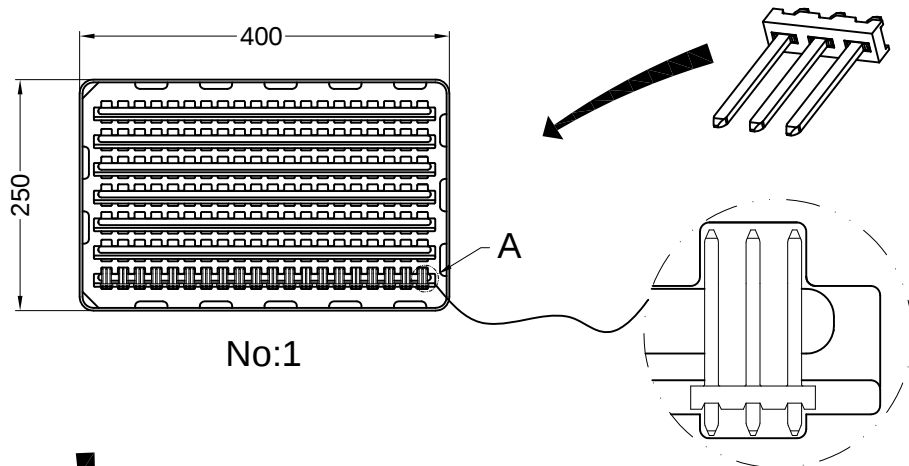

No:1


局部放大图A
比例10 : 1

包裝說明:

步骤1: 将4500WV-03-4TS40BKT 良品放入吸塑盘内,
每盘装140PCS。
吸塑盒规格;400*250*13 mm ,T=0.50mm。


步骤2: 将装好产品的32盘吸塑盘叠起来, 上面盖一个
空吸塑盘, 用PE膜扎成1扎。

步骤3: 将1扎产品放入纸箱内, 纸箱开口处用透明胶带
贴合, 并贴上产品标签。
纸箱规格: 420*270*190mm。

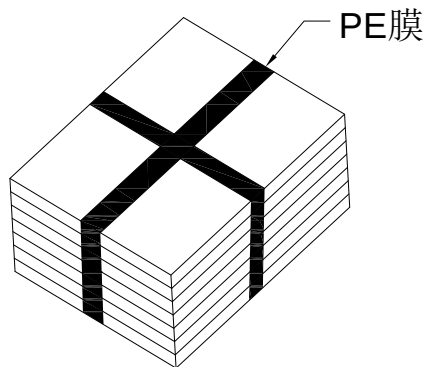

(32盘产品+1个空盘)

No:2

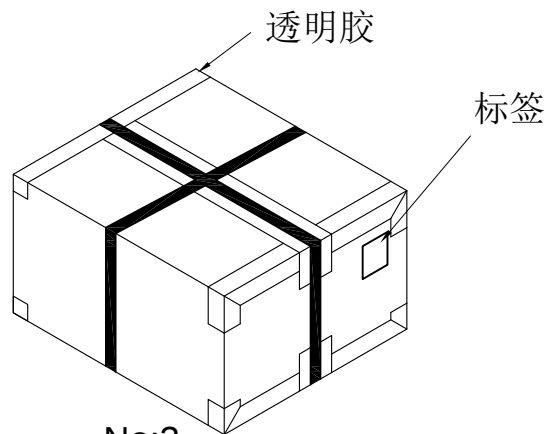

No:3



料号	PIN 数	每盘/pcs	每扎/盘	每箱/扎	每外箱/PCS
4500WV-03-4TS40BKT	3	140	32	1	4480

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	GYA Connectors 东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD	PART NO. 4500WV-03-4TS40BKT						
									TITLE 4.5 mm Crimp Style Connector 包装图						
						APPROVAL			CHECK	DRAWN	DATA				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	YANG	TIAN	TIAN	2018/06/28	UNIT mm	SCALE 1 : 1	NUMBER A-000	REV A0