
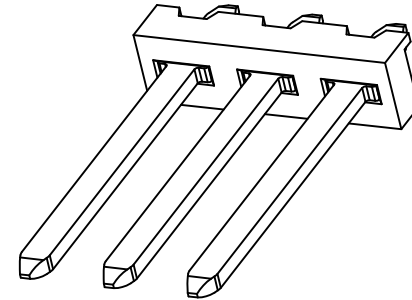
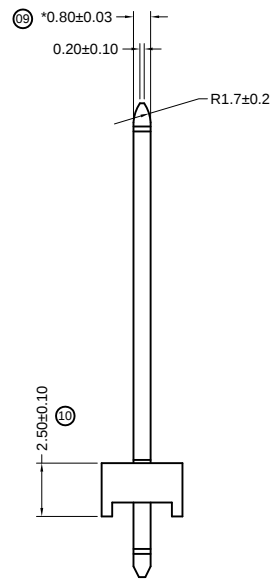

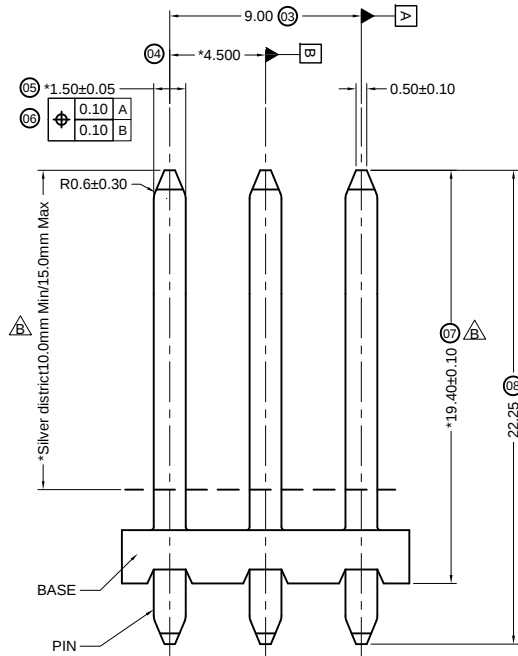


RoHS



- ELECTRICAL PROPERTIES:
CURRENT CARRYING CAPACITY: 600 mA
- MECHANICAL PROPERTIES:
PIN PUSHOUT FORCE FROM PLASTIC SOCKET: ≥ 20 N
- TEMPERATURE PROPERTIES:
REQUIRED TEMPERATURE WHILE SOLDERING: 270°C FOR 10 SECONDS
OPERATING TEMPERATURE RANGE: -40°C TO 130°C
- MATERIAL:
BASE: PA4T 94V-0 BLACK
PIN: BRASS 0.80*1.50mm
- PLATING:
UNDERPLATE: 40u" MIN NICKEL
CONTACT AREA TOPPLATE: 40u" MIN SILVER
80u" MIN MATTE TIN ON SOLDER TAIL

4500 W V X- 03 X - 4T S40 BK X
⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳

- ⑪ Series No
⑫ Category: W-Wafer
⑬ Welding Board Angle: V-Straight 180°
⑭ Welding Way: Dip-Blank
⑮ Row No.-Pin No: 03- 03Pin
⑯ Special No: Blank
⑰ Material: 4T-PA4T 94V-0;
⑱ Plating Category:: S40-Plating Silver 40u" Min
⑲ Color : BK-Black
⑳ Packag: R-Reel 、 T-Tary



							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	GYA Connectors 东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. SWB:4500WV-03-4TS40BKT CPN:008825398C			
								APPROVAL	CHECK	DRAWN	DATA	TITLE Pin Header 3Pins 180° connectors			
												UNIT MM	SCALE 1 : 1	NUMBER A-000	REV A0
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	YANG	TIAN	TIAN	2017/08/07				

1 2 3 4 5 6 7 8