


RoHS


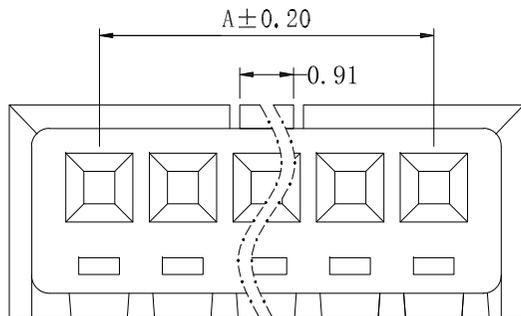


■ Specifications(规格):

- Voltage rating(额定电压): 200V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥100MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

A1254 H X-XX X-N0 XX
① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别:
H-HSG
- ③ 外观形态:
空码-普通
- ④ PIN数或防呆KEY形态:
单排-XX
- ⑤ 塞PIN及特殊码
- ⑥ 材质:
NO-PA66 UL94V-0
- ⑦ 颜色:
OR-橙色

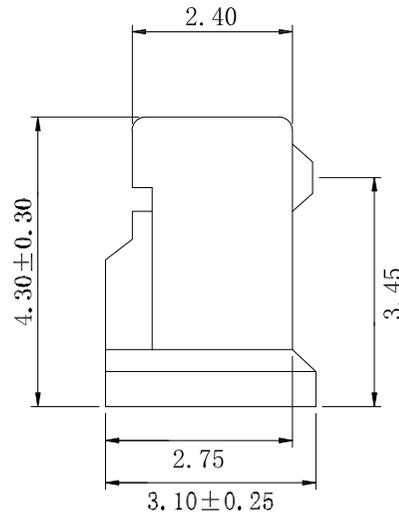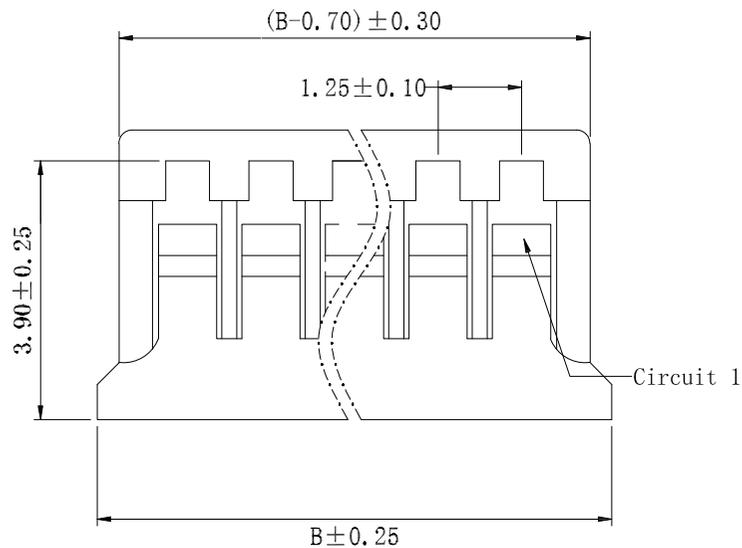

Poles	Dimensions (mm)	
	A	B
2	1.25	3.95
3	2.50	5.20
4	3.75	6.45
5	5.00	7.70
6	6.25	8.95
7	7.50	10.20
8	8.75	11.45
9	10.00	12.70
10	11.25	13.95
11	12.50	15.20
12	13.75	16.45
13	15.00	17.70
14	16.25	18.95
15	17.50	20.20

A1254H-XX-N0	PA 66 UL 94V-0	A1254T	A1254W	1,000Pcs
PART NO	Material	Suitable GYA Terminal	Mates With GYA Wafer	Q' ty/Bag

GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.15
X.° ±2°
PROJECT



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL CHECK DRAWN DATE

Yangzhengguo Yangjinyi Lvtiansheng 2016/08/26

PART NO. A1254H-XX-N0

TITLE 1.25 mm Crimp Style Connectors

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-025

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
------	-----	---------	-------------	--------	----------




RoHS




- Specifications(规格):
- Voltage rating(额定电压): 200V AC / DC
 - Current rating(额定电流): 1A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): ≥100MΩ
 - Contact resistance(接触电阻): ≤20mΩ
 - After environmental testing(环境测试后): ≤30mΩ

A1254 T X-P SN X-X
① ② ③ ④ ⑤ ⑥ ⑦



- ① 系列
- ② 类别:
T-端子
- ③ 外观形态:
空码-普通脚
- ④ 材质: P-磷铜
电镀类别: G**-镀金 V**-镀全金
- ⑤ *01-1U" *02-2U" *03-3U" *05-5U"
SN-镀亮锡(80-120U")
- ⑥ 电镀方式: 空码-先冲后镀
- ⑦ 模号/MARK及特殊码

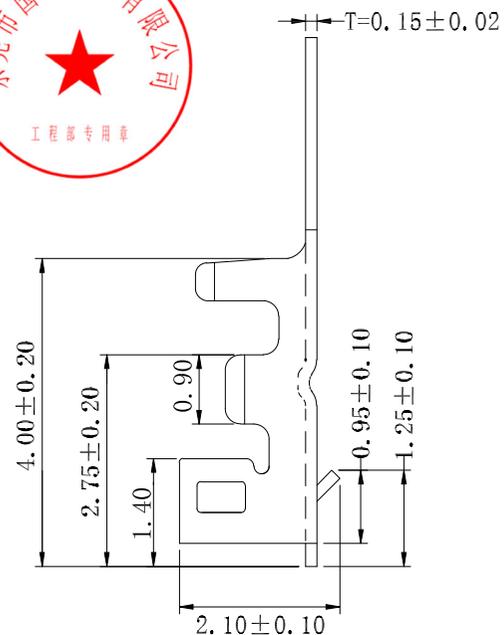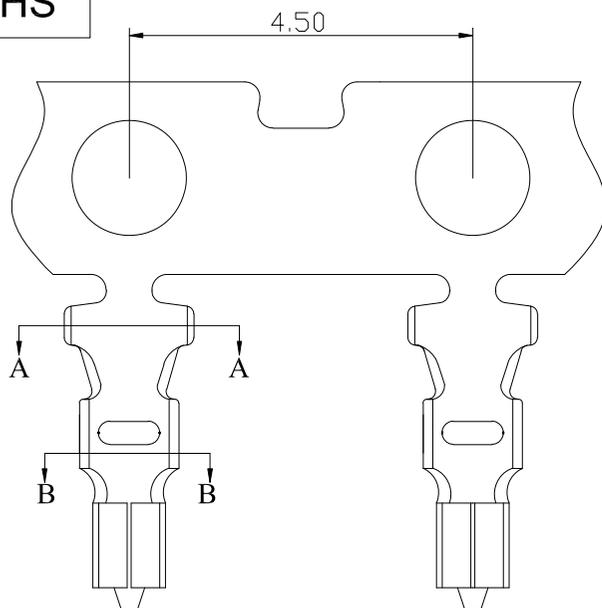

Section A-A



Section B-B

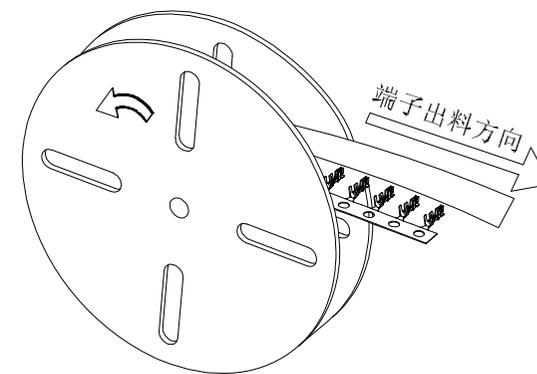

Receiving direction

A1254T-PSN	Phosphor Bronze	AWG#28-32	1.00mm(Max)	Stamping Before Plating:30~50u" Ni;80~120u"Sn	A1254H	15,000Pcs
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In GYA Housing	Q' ty/Reel

					GENERAL TOLERANCE .X ±0.35 .XX ±0.25 .XXX ±0.15 X." ±2"		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.		PART NO. A1254T-XXX											
					APPROVAL Yangzhengguo		CHECK Yangjinyi		DRAWN Lviansheng		DATE 2016/08/26									
					PROJECT 				TITLE 1.25 mm Crimp Style Connectors		UNIT mm		SCALE 1:1		SHEET 1/1		REV A0		NUMBER A-025	
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL															

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8