

RoHS

F





E

D


C

B


A

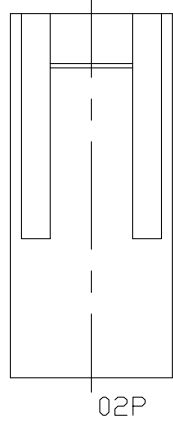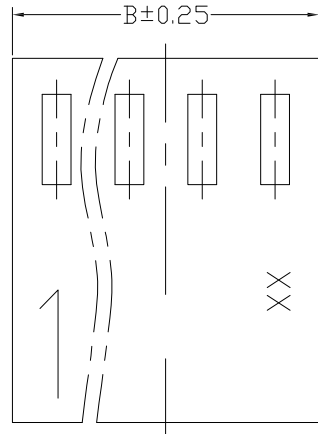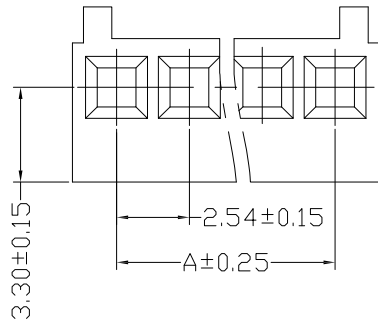

02P

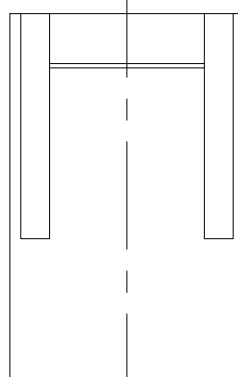

03P

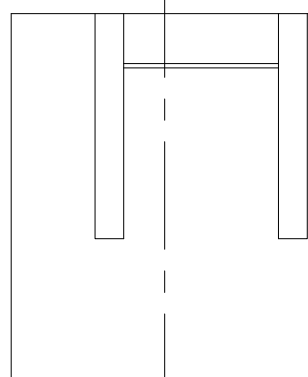

04P-3

SPECIFICATIONS

- 1) Voltage rating:250V AC,DC.
- 2) Current rating:2.5A AC,DC.
- 3) Withstanding voltage:800V AC/minute.
- 4) Insulation resistance:1,000M Ω min.
- 5) Temperature range:-25°~+85°.
- 6) Contact resistance:Initial value/10m Ω max,after environmental testg /20m Ω max.

HOUSING

- 1) Part No.:A2510HF-nP
- 2) Poles:2-15
- 3) Material:PA66 UL94 V2/V0
- 4) Qty:1000pcs/bag

Poles	Part No.	Dimensions	
		A	B
2	A2510HF-2P	2.54	5.62
3	A2510HF-3P	5.08	8.16
4	A2510HF-4P	7.62	10.70
5	A2510HF-5P	10.16	13.24
6	A2510HF-6P	12.70	15.78
7	A2510HF-7P	15.24	18.32
8	A2510HF-8P	17.78	20.86
9	A2510HF-9P	20.32	23.40
10	A2510HF-10P	22.86	25.94
11	A2510HF-11P	25.40	28.48
12	A2510HF-12P	27.94	31.02
13	A2510HF-13P	30.48	33.56
14	A2510HF-14P	33.02	36.10
15	A2510HF-15P	35.56	38.64



GENERAL TOLERANCE

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

X.° $\pm 2^\circ$

PROJECT

PROJECT

GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangjinyi

Lvtiansheng

2016/08/26

PART NO.

A2510HF-XXX

TITLE

2.54mm Crimp Style Connector

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-022

F

E


D

C

B

A

RoHS



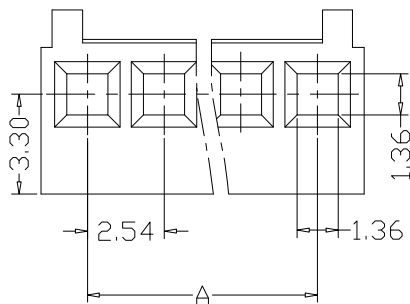


SPECIFICATIONS

- 1.Current Rating: 2.5A AC,DC
- 2.Voltage Rating: 250V AC,DC
- 3.Temperature Range: -25°C ~+85°C
- 4.Contact Resistance: 20mWMax
- 5.Insulation Resistance: 1000MWMin
applicable wire:AWG #22~#28
insulataion □.D.1.50mm(max)

HOUSING

- 1) Part No.:A2510H-nP
- 2) Poles:2-15
- 3) Material:PA66 UL94 V2 /V0
- 4) Qty:1000pcs/bag

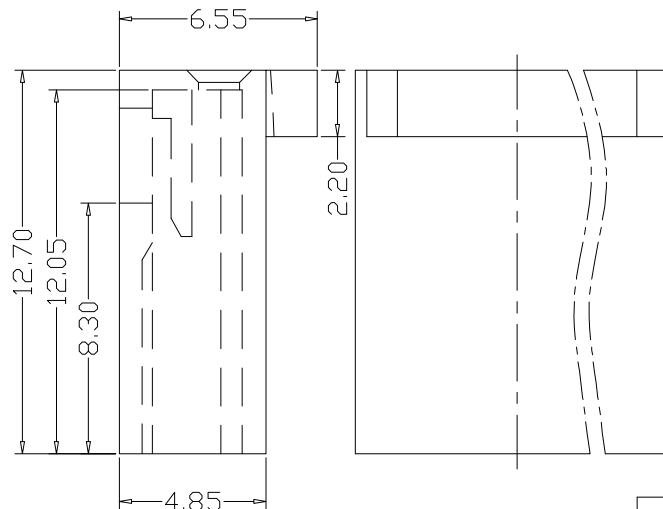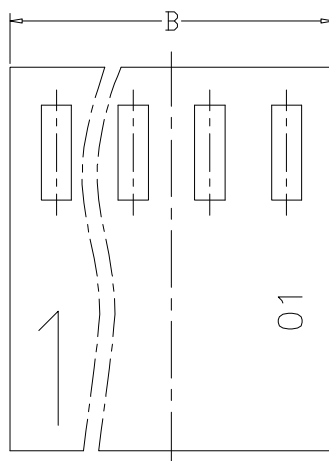

15P	35.56	38.64	08P	17.78	20.86
14P	33.02	36.10	07P	15.24	18.32
13P	30.48	33.56	06P	12.70	15.78
12P	27.94	31.02	05P	10.16	13.24
11P	25.40	28.48	04P	7.62	10.70
10P	22.86	25.94	03P	5.08	8.16
09P	20.32	23.40	02P	2.54	5.62
PART NO.	A	B	PART NO.	A	B
	Dimensions			Dimensions	

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co.,ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangjiyini

Lvtiansheng

2016/08/26

PART NO.

A2510H-XXX

TITLE

2.54mm Crimp Style Connector

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-022

DATE

REV

ECN NO

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4



5

6

7

8

RoHS

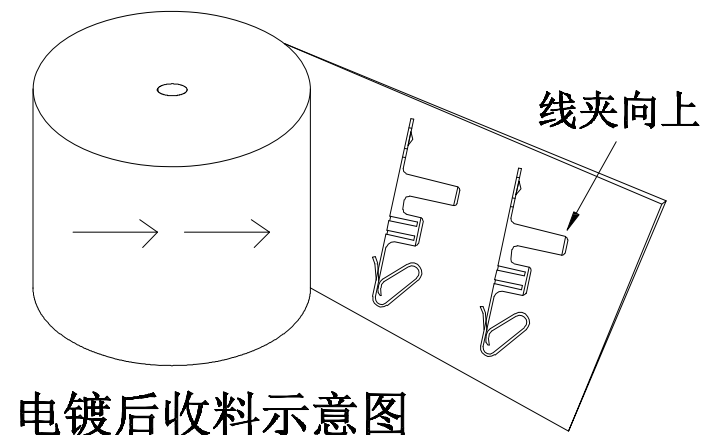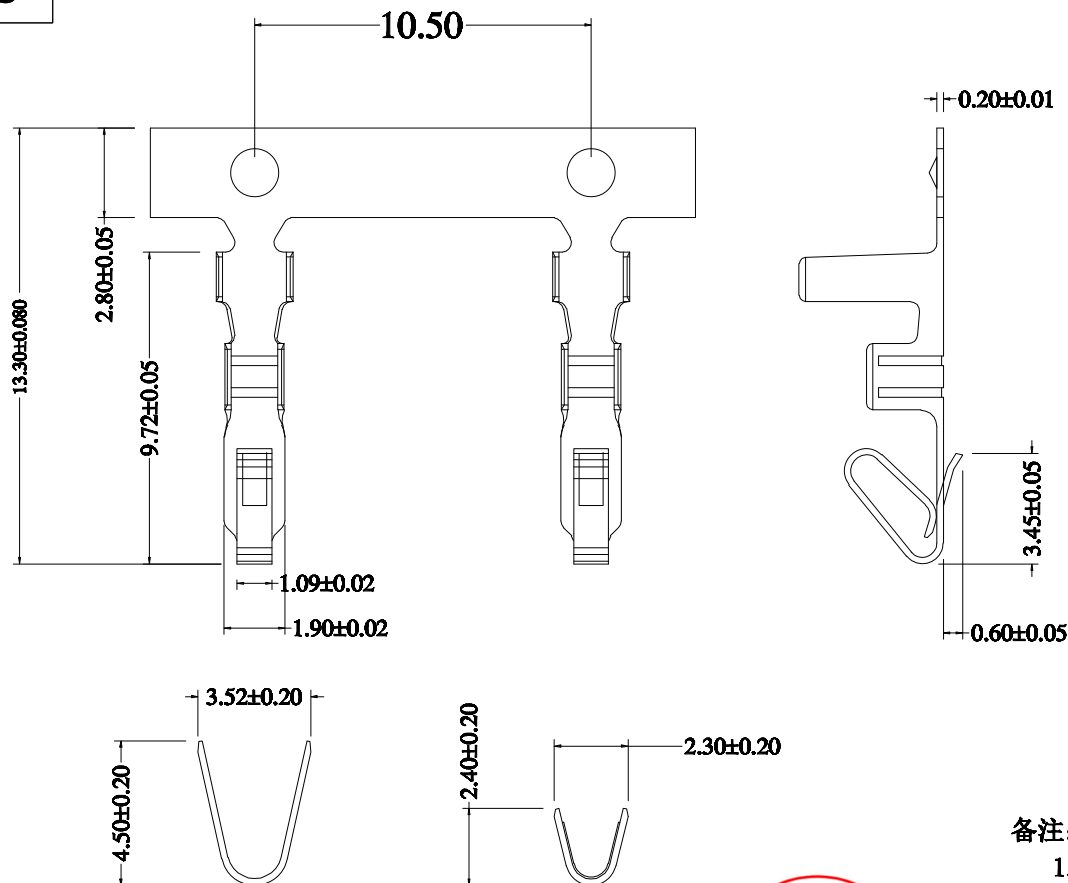

电镀后收料示意图
顺收线夹向上

备注:

1. 材质: T=0.2mm 磷铜 C5191 EH
2. 产品不可有压伤, 裂痕
3. 产品毛边 0.05mm.
4. 加*所示尺寸为首次量测尺寸加*为巡检量测尺寸
5. 表面处理: 先冲后镀(亮锡) 镍30-50 "U" 锡80-100 "U"
6. 电镀后盐雾测试须过24H/MIN



						GENERAL TOLERANCE		GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd				PART NO.				
						.X ±0.30	A2510T-XXX									
						.XX ±0.20	TITLE									
						.XXX ±0.10	2.54mm Crimp Style Connector									
						X.° ±2°	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER	
DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL	PROJECT	Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26	mm	1:1	1/1	A0	A-022	