




Note注解:

- Put the housing in PE bag along with a bag of desiccant, then sealed the PE bag and paste a label.
将 Housing放入PE 袋内，并放入一包干燥剂，并将PE 袋封好.贴上标签.
- Put PE bag packed products in cartons, Packing detail see the table below
将装好产品的PE 袋放入纸箱内，详细包装见下表
- Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定，纸箱开口处用透明胶带贴合.

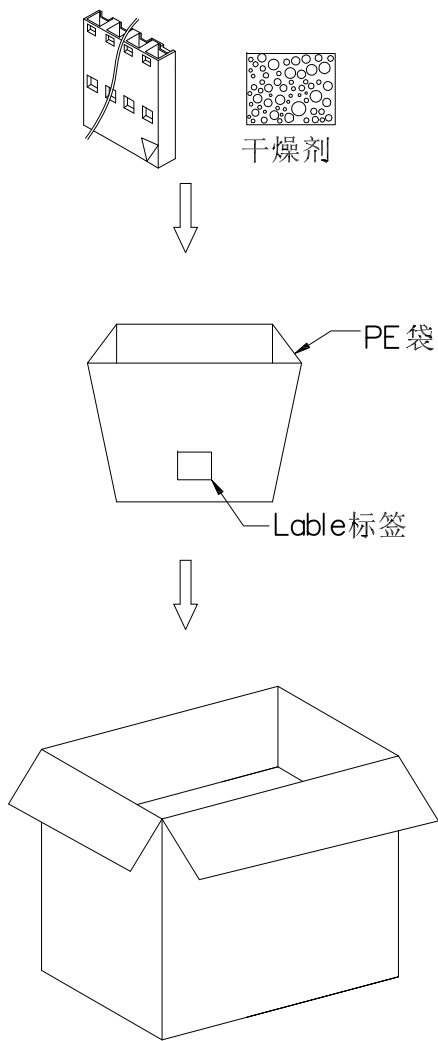


Poles	Bag PCS
02	1000
03	1000
04	1000
05	1000
06	1000
07	1000
08	1000
09	1000
10	1000
11	1000
12	1000
13	1000
14	1000
15	1000

						GENERAL TOLERANCE	GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.				PART NO.: A2545H-XXX-XX				
						X ±0.30					TITLE: 2.54mm Housing Package				
						.XX ±0.20									
						.XXX±0.10									
						X. ±0.2									
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	概 角 	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
							Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26	mm	1:1	1/1	A	A-106






每箱不可有脏污,变形现象,尾数箱必须用填充物

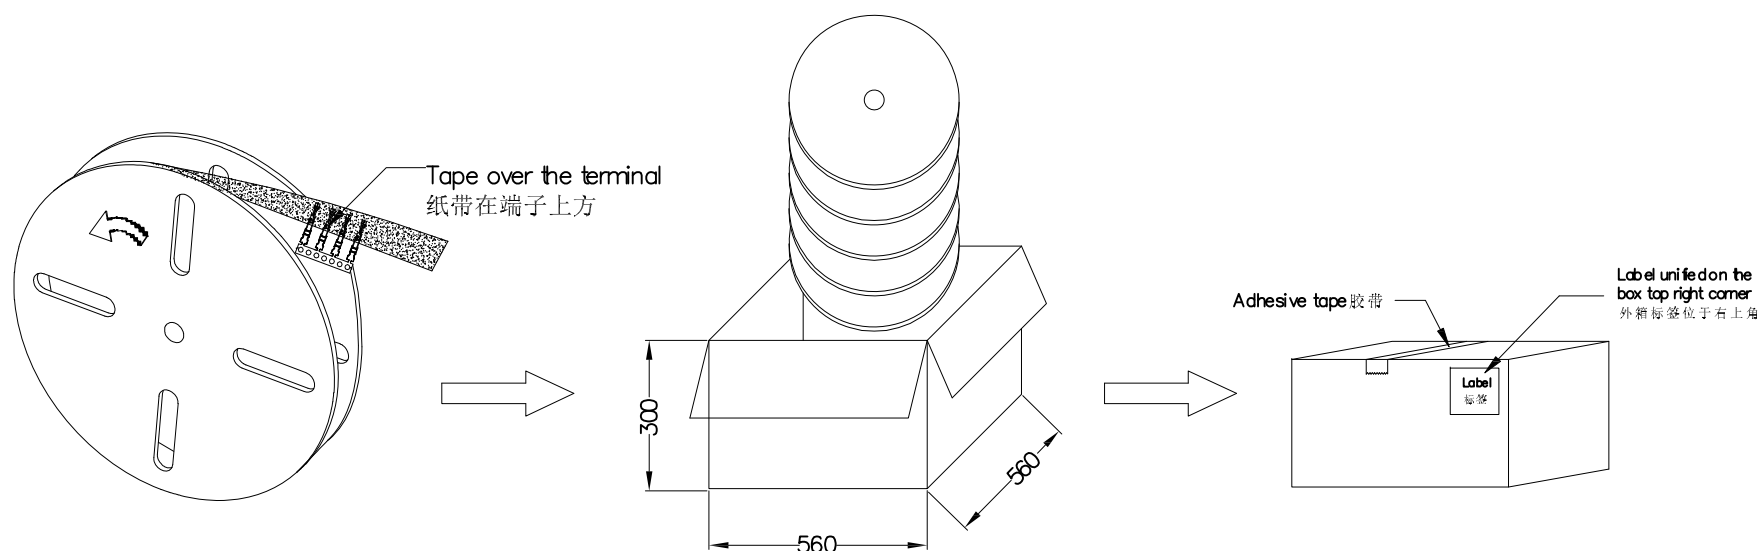

						GENERAL TOLERANCE	GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				PART NO.: A2545T-PXX									
						.X ±0.30					APPROVAL CHECK DRAWN DATE					TITLE: 2.54mm Terminal Packing				
						.XX ±0.20														
						.XXX ±0.10														
						X ±0.2					UNIT	SCALE	SHEET	REV	NUMBER					
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	孔 角 	Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26	mm	1:1	1/1	A	A-106					

RoHS




包装图



包装封口处

内标签

干燥剂

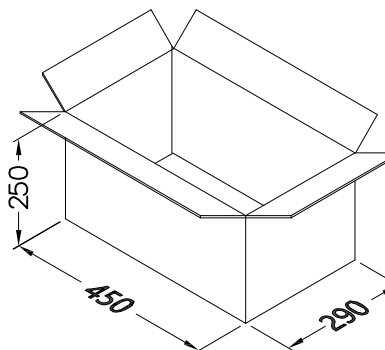

外箱标签

产品

PE 袋

PIN位	PCS/袋	PCS/箱
2P	1000	25000
3P	1000	18000
4P	1000	15000
5P	1000	12000
6P	500	10000
7P	500	8000
8P	500	7000
9P	500	7000
10P	250	6000
11P	250	6000
12P	250	5000
13P	250	5000
14P	250	4500
15P	250	4500
16P	250	4000

备注:

- 1.将检验好的产品放入PE袋内,产品不可少数,并封装好贴上内标签
- 2.将装好产品的PE袋整齐放入纸箱内,封箱贴外箱标签,详细包装见表格
- 3.标签依客户要求而定,纸箱开口处用透明胶带贴合.
- 4.每箱不可有脏污,变形现象,不满一箱时,需以填充物填充,不可有晃动
- 5.纸箱规格:450*290*250mm

纸箱材质:K=K

纸箱厚度:6~7mm



GENERAL TOLERANCE

X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X.X ± 0.2 X.XX ± 0.2 X.XX ± 0.2 X.XX ± 0.2 X.XX ± 0.2 GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangjinyi

Lvtiansheng

2016/08/26

PART NO.:

A2545WV-XX-NOXXX

TITLE:

2.54 mm Crimp Style Connector Package

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A

A-007

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

X

X

X


X

X


X

X


X



产品





PE 袋



包装封口处

内标签

干燥剂

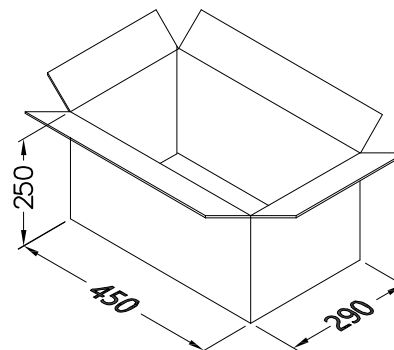

外箱标签


PIN位	PCS/袋	PCS/箱
2P	1000	25000
3P	1000	15000
4P	1000	12000
5P	500	10000
6P	500	8000
7P	500	7000
8P	500	6000
9P	250	5000
10P	250	5000
11P	250	4000
12P	250	4000
13P	100	3000
14P	100	3000
15P	100	2500
16P	100	2500



备注:

1. 将检验好的产品放入PE袋内, 产品不可少数, 并封装好贴上内标签
2. 将装好产品的PE袋整齐放入纸箱内, 封箱贴外箱标签, 详细包装见表格
3. 标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. 每箱不可有脏污, 变形现象, 不满一箱时, 需以填充物填充, 不可有晃动
5. 纸箱规格: 450*290*250mm
纸箱材质: K=K
纸箱厚度: 6~7mm

						GENERAL TOLERANCE		GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				PART NO.: A2545WR-XX-NOXXX								
						X ±0.35						TITLE:								
						XX ±0.25						254 mm Crimp Style Connector Package								
						XXX±0.15						UNIT SCALE SHEET REV NUMBER								
						X ±0.2		APPROVAL		CHECK		DRAWN		DATE		mm 1:1 1/1 A A-007				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	概 角		Yangzhengguo		Yangjinyi		Lvtiansheng		2016/08/26						
1		2	3	4		5		6		7		8								

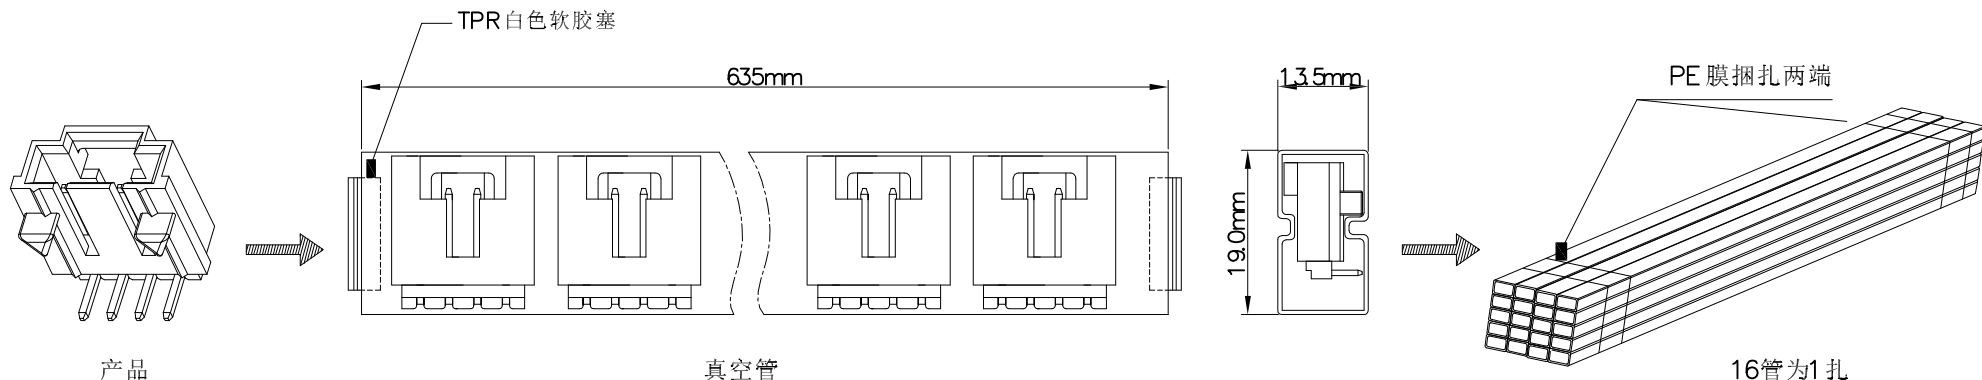

	PIN 位	PCS/管	PCS/箱
	02P	68	9792
	03P	53	7632
	04P	43	6192
△	05P	36	5184
△	06P	31	4464
	07P	28	4032
	08P	25	3600
△	09P	22	3168
△	10P	20	2880
	11P	19	2736
△	12P	17	2448



包装说明:

步骤1: 先将真空管的一头塞入白色软胶塞固定, 再将检验好的良品按标准数量及统一方向整齐的装入真空管内, 在另一头塞入白色软胶塞。

真空管规格:635*13.5*19.0mm


步骤2: 16管叠起来为1扎, 然后用PE膜捆扎两端。

步骤3: 9扎为一箱, 然后用透明胶带封箱, 贴上外箱标签。



纸箱规格: 650*250*200 mm.

纸箱材质:K=K, 纸箱厚度:6~7mm

注: 不满箱时, 需以填充物填充, 不可有晃动


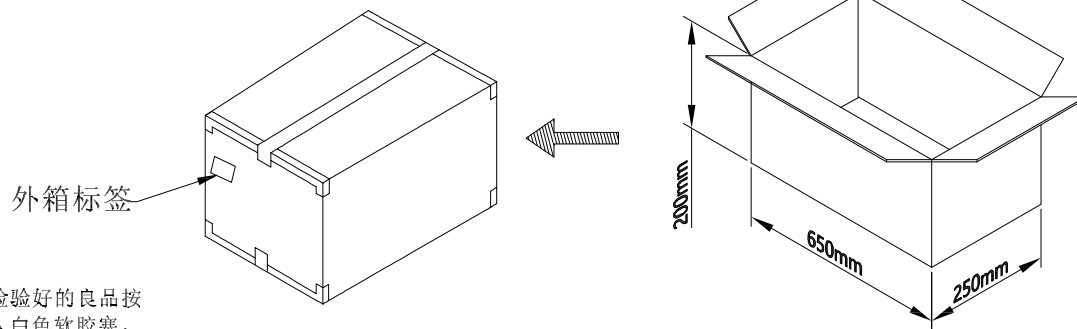


						GENERAL TOLERANCE		GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.				PART NO.:					
						X	±0.35					A2545WR-XXP-9TXXX					
						XX	±0.25					A2545WR-XXSHF-4TXXX					
						XXX	±0.15					TITLE:					
						X	±2°	APPROVAL		CHECK	DRAWN	DATE	254 mm Crimp Style Connector Package				
						祝 角		Yangzhengguo		Yangjinyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL							mm	1:1	1/1	A	A-007	

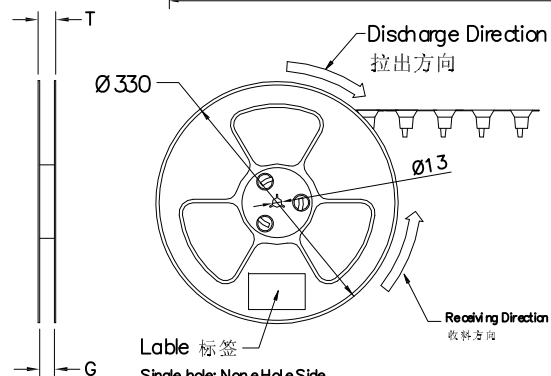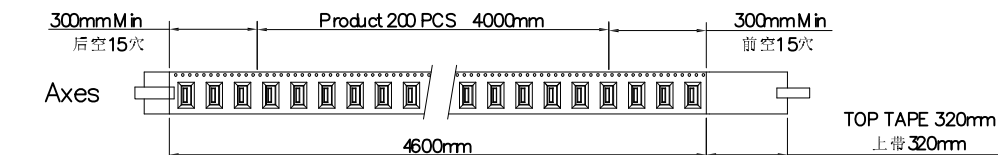



COVER TAPE PEEL STRENGTH: 20~420g
上带剥离力量: 20~420g

速度 PEEL SPEED: 300mm/minute

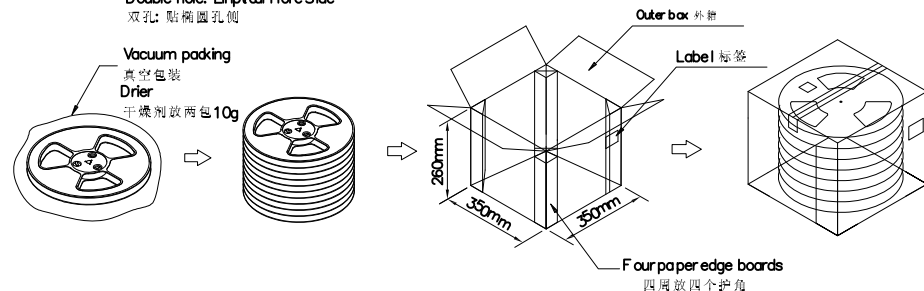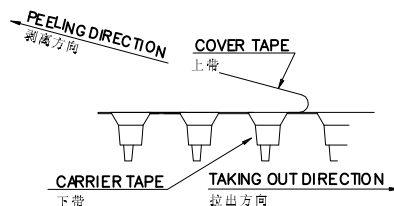

Note:

1. Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Material for PS; 材质为PS材质; Color颜色: Natural透明色
4. bracer保护带: Color颜色: Natural透明色; 厚度0.40mm最小
5. Thickness = 0.50 ± 0.05 ; 材料厚度为 0.50 ± 0.05 mm
6. Cover Tape 上带: 冷封
7. Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm

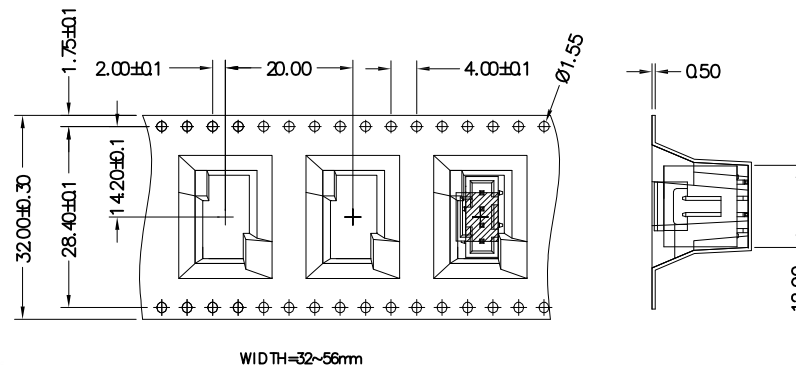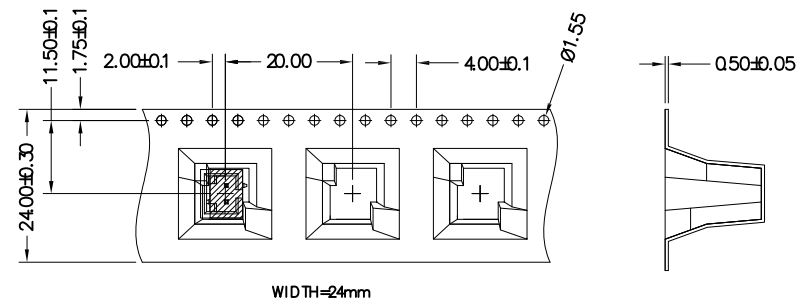

A2545WVS-XXB-XXX	Pin No.	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
	A2545WVS-02B	24	/	11.50	29.5	25.5	200	8	1600
	A2545WVS-03B								
	A2545WVS-04B	32	28.4	15.50	37.5	33.5	200	6	1200
	A2545WVS-05B								
	A2545WVS-06B								
	A2545WVS-07B								
	A2545WVS-08B	44	36.4	19.50	48.5	44.5	200	5	1000
	A2545WVS-09B								
	A2545WVS-10B								
	A2545WVS-11B	56	44.4	23.50	60.5	56.5	200	4	800
	A2545WVS-12B								



GENERAL TOLERANCE

X ± 0.35

XX ± 0.25

XXX ± 0.15

X' ± 0.2



GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangjiyiyi

Lvtiansheng

2016/08/26

PART NO.:

A2545WVS-XXB-XXXX

TITLE:

254mm Connectors 180° Package

UNIT

SCALE

1:1

SHEET

1/1

REV

A


NUMBER

A-203




后空10穴 Product 300PCS 7200mm 前空10穴

Axes

7680mm


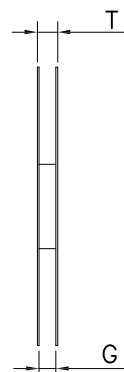
TOP TAPE 320mmMin
上带320mm最小Discharge Direction
拉出方向Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧Receiving Direction
收料方向COVER TAPE PEEL STRENGTH: 20~120g
上带剥离力量: 20~120g

速度 PEEL SPEED: 300mm/minute

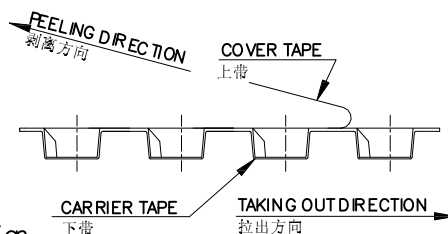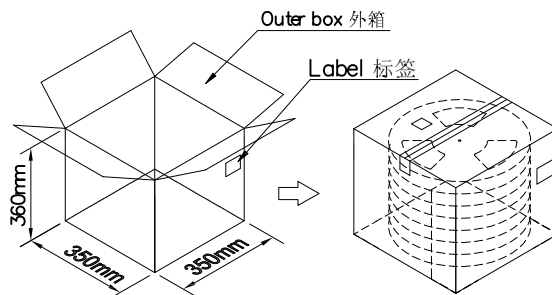Vacuum packing
真空包装
Drier
干燥剂放1包5g

Note:

1. Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance $\pm 0.2\text{mm}$; 圆孔十个孔距离累计允许公差为 $\pm 0.2\text{mm}$
3. Material for PS; 材质为PS, Color颜色: Natural 透明色
4. bracer保护带; Color颜色: Natural 透明色
5. Thickness $= 0.50 \pm 0.05$; 材料厚度为 $0.50 \pm 0.05\text{mm}$
6. 纸箱材质: K=K; 纸箱厚度 $\pm 1\text{mm}$

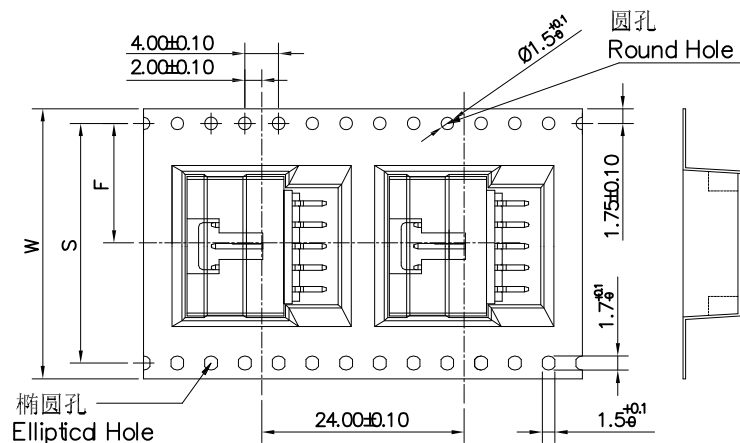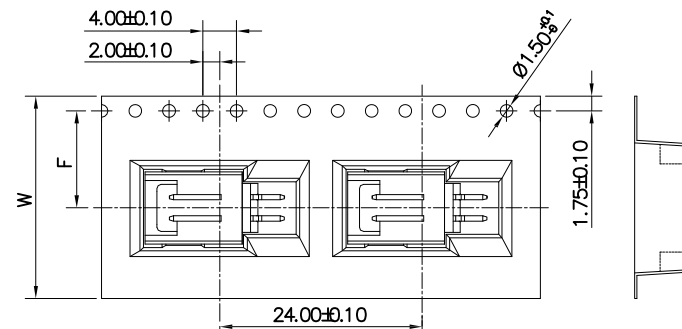

A2545WRS-XXA-XXXX	Pin No.	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
	A2545WRS-02A	24	/	11.50	29.5	25.5	300	9	2700
	A2545WRS-03A								
	A2545WRS-04A								
	A2545WRS-05A	32	28.4	15.50	37.5	33.5	300	9	2700
	A2545WRS-06A								
	A2545WRS-07A	44	36.4	19.50	48.5	44.5	300	7	2100
	A2545WRS-08A								
	A2545WRS-09A								
	A2545WRS-10A	56	44.4	23.50	60.5	56.5	300	3	900
	A2545WRS-11A								
	A2545WRS-12A								

GENERAL TOLERANCE

X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X.X ± 0.2 X.XX ± 0.2 X.XX ± 0.2 X.XX ± 0.2 X.XX ± 0.2 GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

PART NO.:

A2545WRS-XXA-XXXX

TITLE:

2.54mm Connectors 90° Package

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A	A-000

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangjiayi

Lvtiansheng

2016/08/26

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5

6

7

8